



OPERATING INSTRUCTIONS


SPEAKER SELECTORS

SS-2010 AS

SS-1010 AS

SS-1010R AS

Please follow the instructions in this manual to obtain optimum results from this unit.
We also recommend that you keep this manual handy for your future reference.

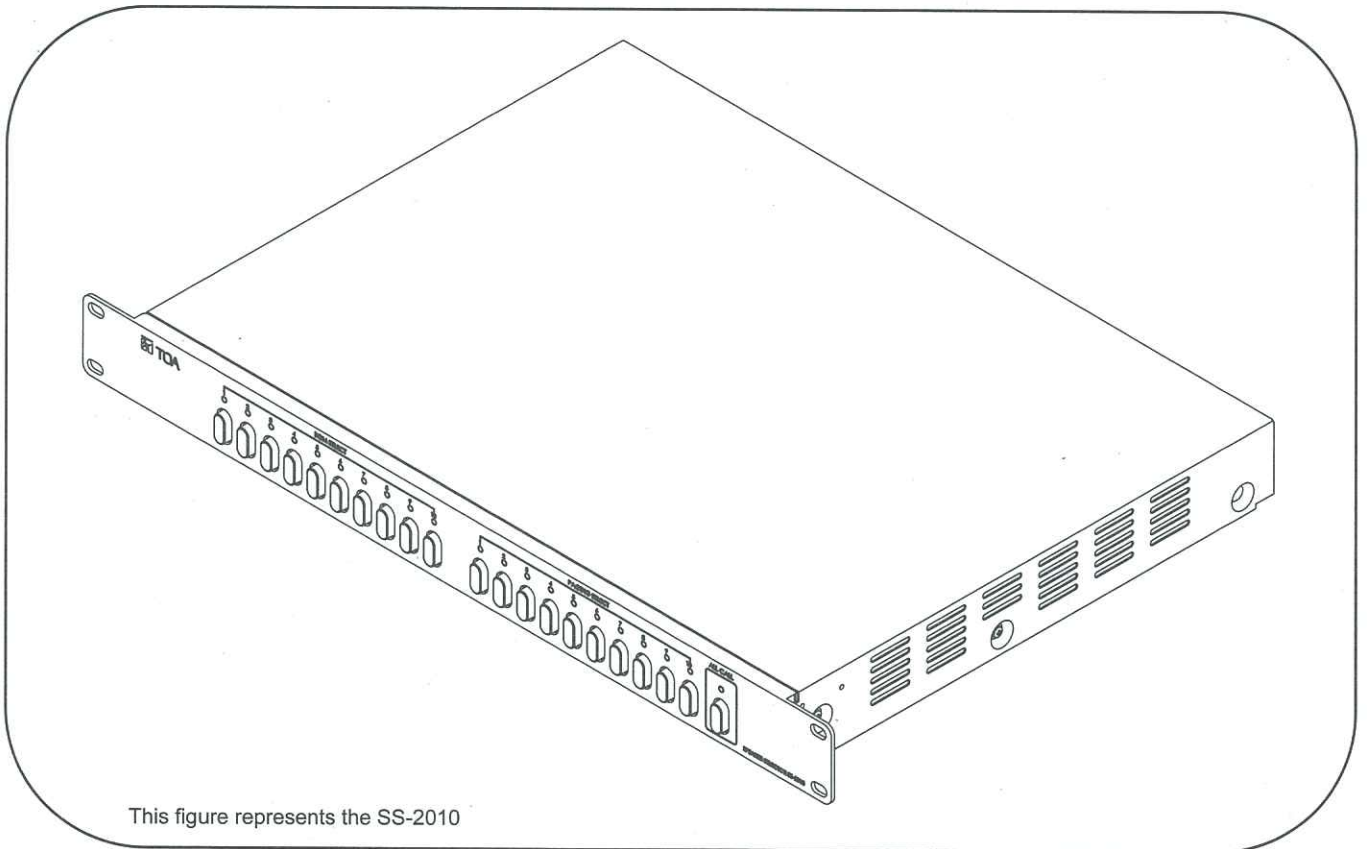

This figure represents the SS-2010

TABLE OF CONTENTS


1. GENERAL DESCRIPTION.....	2
2. FEATURES.....	2
3. NOMENCLATURE AND FUNCTIONS	2
3.1. FRONT PANELS	2
3.2. REAR PANELS	2
4. BLOCK DIAGRAMS	3
5. DIMENSIONS	4
6. SPECIFICATIONS.....	4

TOA Corporation


- Provides protection for DC input voltage if the voltage exceeds the determined specifications and reversed DC polarity installation protection.

3. NOMENCLATURE AND FUNCTIONS

3.1. FRONT PANELS

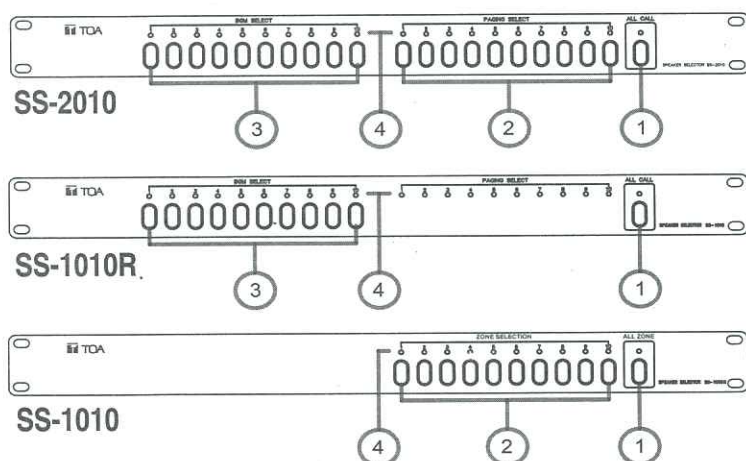

3.2. REAR PANELS

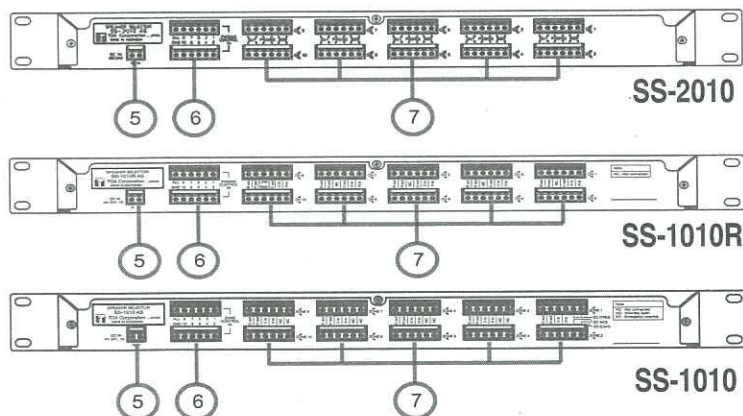

- 1. ALL CALL / ALL ZONE**
Selector switch for all call / all zone.
- 2. PAGING SELECT / ZONE SELECT**
Selector switch to select paging/zone.
- 3. BGM SELECT**
Selector switch to select background music zone
- 4. LED INDICATOR**
Light green if each switch is on.
- 5. DC INPUT**
Connect to DC voltage 24V.
- 6. CONTROL PAGING / ZONE IN**
Connect to external control switch for 1-10 paging/zone selection and all call/zone.
- 7. INPUT / OUTPUT TERMINAL**
Connect to amplifier/speaker.
 - **LINK (ONLY SS-1010R)**
LINK (in CH9 connector)
GND (in CH10 connector)
Connect to other units of SS-1010R.
 - **EMERGENCY OVERRIDE (ONLY SS-1010)**
EO (Trig) in zone 1 connector
Connect to emergency switch. Overriding is required when an emergency switch is pressed.
EO (Com) - EO (NO) in zone 2 connector.
Connect to external switch would enable the installer to apply several functions such as providing 24 V DC output, trigger external device, etc.

