DM-270 / 320 / 420 / 520 Dynamic Microphones

DM-270 / DM-320 / DM-420 / DM-520

- Dynamic, unidirectional microphones
- Designed with superior voice clarity for speech applications ensuring optimal intelligibility

Specifications

Models	DM-270	DM-320	DM-420	DM-520
Type	Moving coil microphone (Dynamic microphone)			
Directivity	Unidirectional			
Rated Impedance	600 Ω, balanced			
Sensitivity (1 kHz, 0dB=1 V/Pa)	-52 dB	-55 dB	-52 dB	-55 dB
Frequency Response	100Hz - 15kHz	100Hz - 12kHz	80Hz - 13kHz	
Connection Cable	Separate type			
Cable Length	5m	7.5m		
Connector	XLR-3			
Talk Switch	Short-off, slide switch			
Finish	Body: Die-cast aluminum; Head: Die-cast aluminum / zinc plated steel wire			
Dimensions	Φ47 x 175 mm	Φ52 x 183 mm		Φ50 x 176 mm
Weight	300g (without connection cable)		280g (without connection cable)	232g (without connection cable)
Accessory	Microphone holder (W 5/16" 18 thread)			

CHARACTERISTIC DIAGRAMS

Frequency Response (1W/0.5m)

DM-270 AS

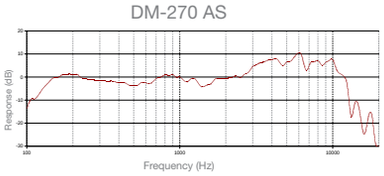

DM-320 AS



DM-420 AS

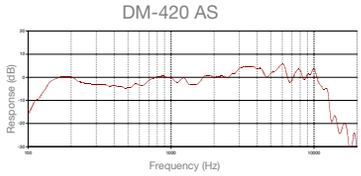

DM-520 AS



EM-360 AS



Polar Response

DM-270 AS



DM-320 AS



DM-420 AS



DM-520 AS



EM-360 AS



Smiles for the Public

Like us on Facebook
facebook.com/TOAasiapacific

TOA Electronics Pte Ltd
www.toa.com.sg

Specifications are subject to change without notice.
Printed in Singapore (65) 865-0518-03