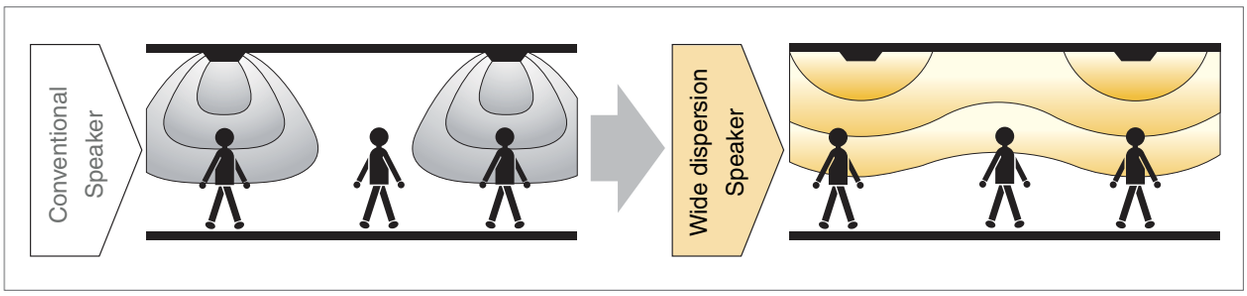


## 5" full-range 30w

F-2322C

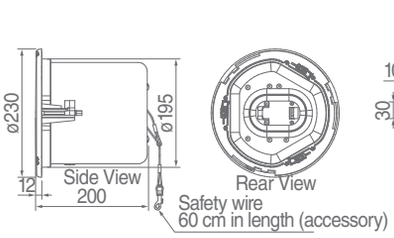





## 5" full-range 30w

F-122C

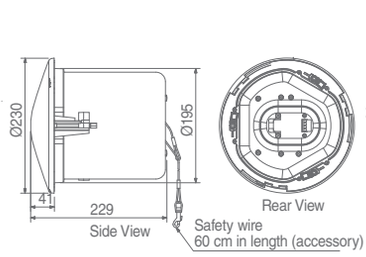





## 4" full-range 6w

F-1522SC







## 6" ceiling subwoofer 60w

FB-2862C

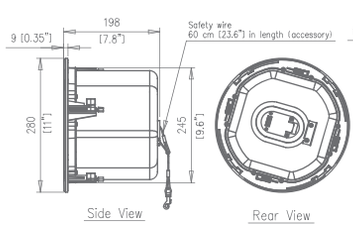




## Co-axial type

EASE data

| Specifications | F-2852C | F-2352C | F-2352SC |
|---|---|---|---|
| Rated Input | 60W | 30W | 6W |
| Tap Settings | 100 V: 60W, 30W, 15W, 3W<br>70V: 60W, 30W, 15W, 7.5W, 1.5W<br>25V: 7.5W, 3.7W, 1.9W, 0.9W, 0.2W<br>8Ω | 100V: 30 W, 10W, 3W, 1W<br>70V: 30 W, 15 W, 5 W, 1.5W, 0.5W<br>25V: 3.7W, 1.9W, 0.6W, 0.2W, 0.06W<br>8Ω | 100 V: 6 W, 3 W, 1W, 0.5W<br>70V:6W, 3W, 1.5W, 0.5W, 0.25W<br>25V: 0.75W, 0.4W, 0.2W, 0.06W, 0.03W<br>8Ω |
| Sensitivity (1W, 1m) | 91dB | 90dB | 89dB |
| Max SPL (Rated input, 1m) | 109dB | 105dB | 97dB |
| Frequency Response | 60Hz – 20kHz | 70Hz – 20kHz | 80Hz – 20kHz |
| Mounting Hole Diameter | ø250 mm | ø200mm | ø200mm |
| Speaker Component | Low: 6" cone-type,<br>High: Dome-type | Low: 5" cone-type,<br>High: Balanced dome-type | Low: 5" cone-type,<br>High: Balanced dome-type |
| Color | Baffle: black/Rim: white/Punched net: white | | Baffle: black/Rim: white/Punched net: white/<br>Dust proof bag: black |
| Dimensions | ø280 x 227(D) mm | ø230 x 229(D) mm | ø230 x 154(D) mm |

## Full-range type

EASE data

| Specifications | F-2322C | F-122C | F-1522SC |
|---|---|---|---|
| Rated Input | 30W | | 6W |
| Tap Settings | 100V: 30 W, 10W, 3W, 1W<br>70V: 30 W, 15 W, 5 W, 1.5W, 0.5W<br>25V: 3.7W, 1.9W, 0.6W, 0.2W, 0.06W<br>8Ω | | 100 V: 6 W, 3 W<br>70V: 6W, 3W, 1.5W<br>25V: 0.75W, 0.4W, 0.2W<br>8Ω |
| Sensitivity (1W, 1m) | 90dB | | 88dB |
| Max SPL<br>(Rated input, 1m) | 105dB | | 96dB |
| Frequency Response | 70Hz – 20kHz | | 65Hz – 18kHz |
| Mounting Hole Diameter | ø200mm | | ø135mm |
| Speaker Component | 5" cone-type | | 4" cone-type |
| Color | Baffle: black/Rim: white/<br>Punched net: white | | Baffle: black/Rim: white/Punched net: white/Dust proof bag: black |
| Dimensions | ø230 x 200 (D) mm | ø230 x 229(D) mm | ø155 x 117(D) mm |

## Subwoofer

| Specifications | FB-2862C |
|---|---|
| Rated Input | 60W |
| Tap Setting | 100 V: 60W, 30W, 15W, 3W<br>70V: 60W, 30W, 15W, 7.5W, 1.5W<br>25V: 7.5W, 3.7W, 1.9W, 0.9W, 0.2W<br>8Ω |
| Sound Pressure Level<br>(1W, 1m) | 87dB, installation in 1/2 free sound field<br>(Measured by unit installed in center of ceiling or wall)<br>81 dB, installation in free sound field<br>(measured in anechoic chamber) |
| Frequency Response | 60Hz – 250Hz |
| Mounting Hole Diameter | ø250mm |
| Speaker Component | Low Frequency: 6" cone-type |
| Color | Baffle: black/Rim: white/<br>Punched net: white |
| Dimensions | ø280 x 198(D) mm |

## Accessories

| | | Article number | F-2852C | F-2352C | F-2352SC | F-2322C | F-122C | F-1522SC | FB-2862C |
|---|---|---|---|---|---|---|---|---|---|
| | | Anchor Hanging Bracket | HY-AH1 | • | • | • w/HY-RR2 | • | • | – | • |
| | | Tile Bar Bridge | HY-TB1 | • | • | • w/HY-RR2 | • | • | – | • |
| | | Back Can | HY-BC1 | – | • | • | • | • | – | – |
| | | Trim Ring | HY-TR1 | – | • | • w/HY-RR2 | • | • | – | – |
| | | Reinforcement Ring | HY-RR1 | – | – | – | – | – | • | – |
| | | Reinforcement Ring | HY-RR2 | – | – | • | – | – | – | – |

TOA
Smiles for the Public

Like us on Facebook
facebook.com/TOAasiapacific

TOA Electronics Pte Ltd
www.toa.com.sg

Specifications are subject to change without notice.
Printed in Singapore (65) 865-1018-02