



Professional Digital *Active Speakers*

THE ULTIMATE
TOURING &
INSTALLATION
SERIES







LVX active loudspeakers series is the answer to all those fixed installations and live music requirements where sound reinforcement systems must be lightweight, stylish, portable, and powerful. As a result of the experience in touring gear designing, the new LVX series offers smart solutions with a special attention to the needs of fixed and portable installations.



APPLICATIONS

- *Live sound*
- *Stage Monitoring*
- *Portable and installed audio-visual systems*
- *Clubs, Ballrooms, Houses of worship, Museums and Theatres*

Digital Active Speakers

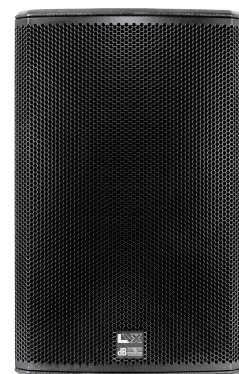

	LVX 8	LVX 10	LVX 12	LVX 15
Frequency Response [-10dB]	65 - 20,000 Hz	60 - 20,000 Hz	55 - 20,000 Hz	49 - 20,000 Hz
Frequency Response [-6dB]	80 - 19,000 Hz	70 - 19,000 Hz	62 - 19,000 Hz	54 - 19,000 Hz
Max SPL	121 dB	125 dB	127 dB	128 dB
HF	1", 1.5" v.c			
Directivity	90° x 70°		90° x 40°	
Horn	Rotatable CD Horn			
LF	8", 1.5" v.c	10", 2" v.c	12", 2" v.c	15", 2" v.c
Amp Technology	Digipro G2®			
Amp Class	Class-D			
PRG Power	400 W		800 W	
Peak Power	800 W		1600 W	
Controller	DPS 28/56 bit			
AD/DA Converter	24bit/45kHz			
System Presets	Flat, Processed			
Limiter	Dual Active Peak, RMS, Thermal			
Crossover Frequency LF HF	2050 Hz		1800 Hz	
Slope MF-HF	24 dB/Octave			
Housing	Multiplex			
Angles Up	Monitor Use 40°		Monitor Use 45°	
Handles	1x top side, recessed	1x top side	3(1x top side,1x side)	
Rigging points	10 x M8	12 x M8	12 x M10	
Pole mout	D36 mm			
WxHxD	260x420x260 mm.	300x480x300 mm.	360x610x360 mm.	430x680x430 mm.
Weight	10.1 kg.	13.5 kg.	17 kg.	20.7 kg.