


CUSTOMER:

No.	Changes description	Name	Date

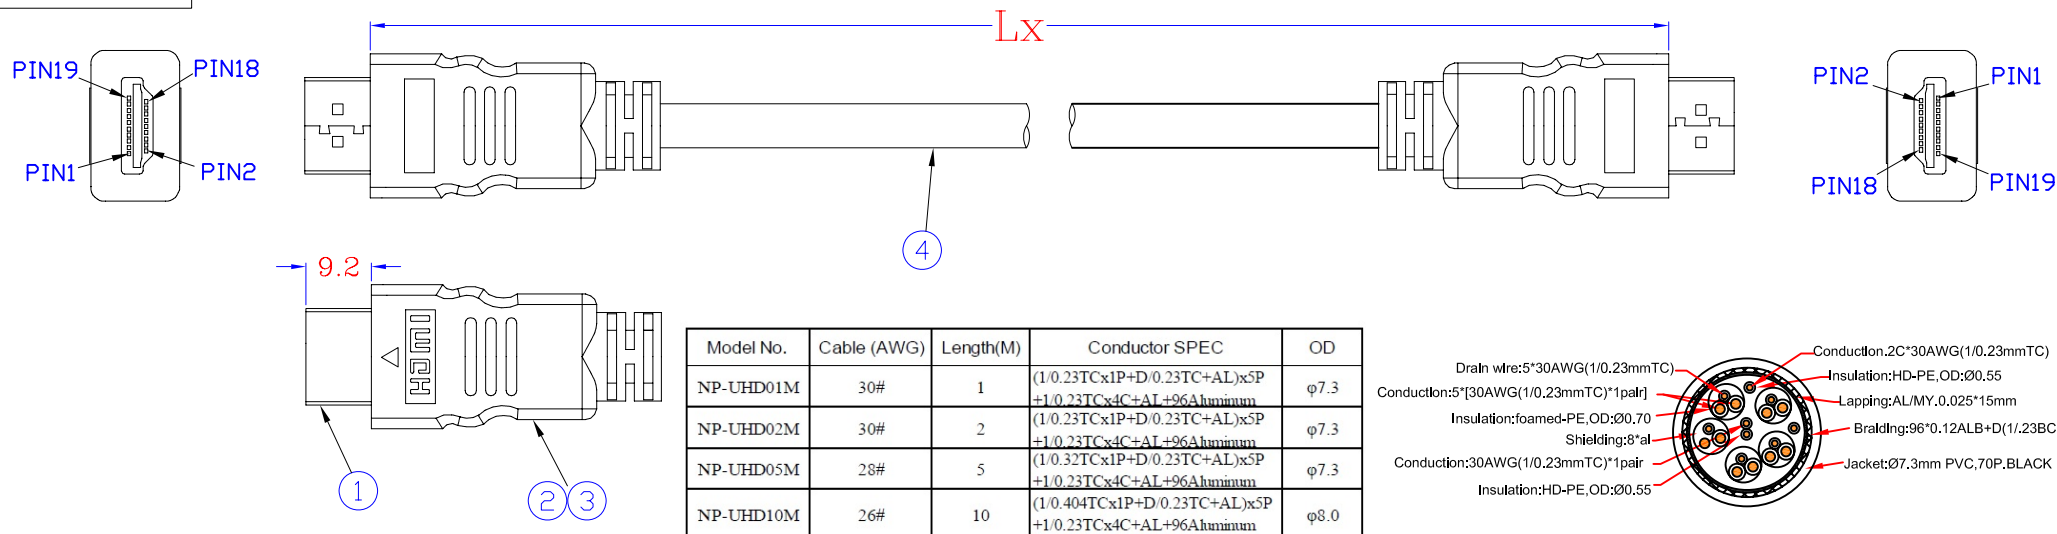


Type A PIN	Signal Assignment	Type A PIN
1 Blue	Blue	1
5 ground	ground	5
3 white	white	3
4 Blue	Blue	4
2 ground	ground	2
6 white	white	6
7 Blue	Blue	7
11 ground	ground	11
9 white	white	9
10 Blue	Blue	10
8 ground	ground	8
12 white	white	12
14 Blue	Blue	14
17 ground	ground	17
19 white	white	19
15 Yellow	Yellow	15
16 Oreger	Oreger	16
13 white	white	13
18 red	red	18
SHELL BRAID	BRAID SHELL	

FEATURES


1. Gold-plated Contact
2. compliant ROHS.
3. SUPPORT: 4K@60HZ

ELECTRICAL SPECIFICATION:


1. 100% short break test
 2. The conduction resistance: 5Ω MAX
- Insulation: 300V DC 5MΩ

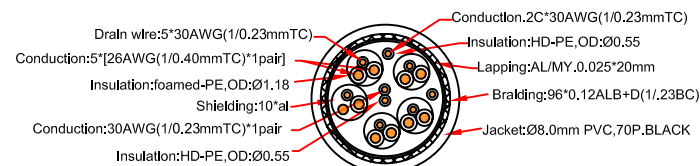

5P+4C(26AWG)

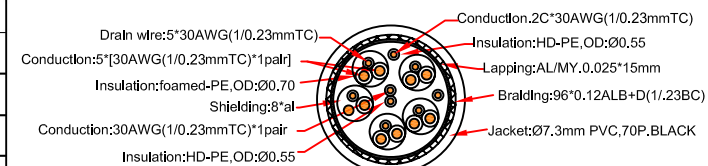

5P+4C(30AWG)

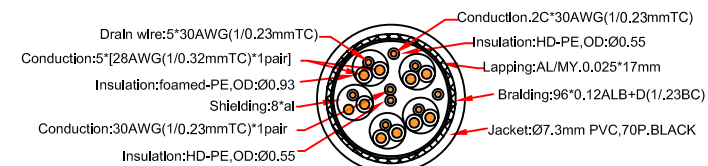

5P+4C(28AWG)

4	WIRE	HDMI Cable 5P+4C BLACK	1 Pcs	Mold Number:
3	PG OUTER MOULDING	45P PVC (BK)		PG inner molding: GM13090701A
2	PG INNER MOULDING	HDPE		PG outer molding: GM13092902A
1	PLUG	HDMI TYPE A PLUG 19PIN (Pins Gold-Plated, Gold-plated copper shell)	2 Pcs	
No.	Partname	Specification	Q'TY	
	Date	2020.11.13		
Scale	Unit	mm		
Free				
Desig.	Draw.	Check.	Appd.	Partname
Z.L.G	Z.L.G			HDMI TO HDMI
				Drw. No.
				RTL1-009
				Rev.
				A/0

LENGTH	AWG
1M	30AWG OD: Ø7.3
3M	
5M	28AWG OD: Ø7.3
10M	26AWG OD: Ø8.0