



CMR 60T

TWO-WAY CEILING MONITOR SPEAKER




Description	CMR 60T is a multipurpose two-way in-ceiling speaker, suitable for a wide range of applications. Thanks to its elegant and discreet design and accurate details, CMR60T pairs any building's aesthetic. The high-quality transducers, aligned in a coaxial configuration, guarantees a precise music reproduction of the entire frequency band and provides impressive sound pressure levels for such a compact enclosure. Installation is easy with three long travel clamps. The magnetic grille allows immediate access to the power selector on the front shell: the line transformer provides 80W full power on 70V and 100V constant voltage lines, and five different power levels.
Features	› 80W RMS power handling › 114 dB max SPL › 70 ÷ 20000 Hz frequency range › 130° constant directivity conical coverage angle › 6.5" high power woofer › 1" neodymium dome tweeter › Self extinguishing plastic body and metal backcan › Steel magnetic front grille › 4 pole EUROBLOCK connector (audio input and parallel link output) › 5 different power levels selectable
Part Number	13100045 CMR 60T W White - RAL 9003 EAN 8024530017446



CMR 60T

TWO-WAY CEILING MONITOR SPEAKER

Line Art 2D

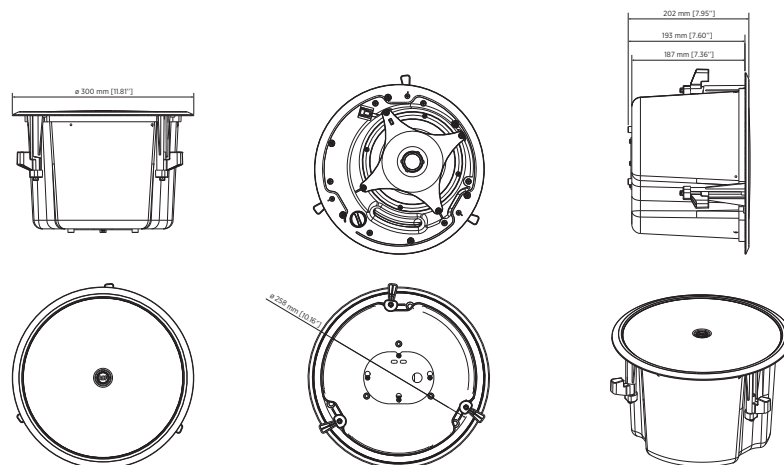

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	70 Hz - 20000 Hz
	Max SPL @ 1m	114 dB
	Coverage angle	130°
	System Sensitivity	89 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	80 W RMS
	Peak Power Handling	320 W PEAK
	Protections	Bulb lamp
	Crossover Frequencies	2500
Transducers	Recommended Amplifiers	XPS SERIES, KPS SERIES, DMA SERIES
	Dome Tweeter	1 x 1.0" neo, 1.0" v.c
	Woofer	1 x 6.5", 1.2" v.c
Input/Output section	Input connectors	Euroblock
	Output connectors	Euroblock
	Constant Voltage Transformer	70/100 V
	Power selection 1	80 W - 125 ohm
	Power selection 2	40 W - 250 ohm
	Power selection 3	20 W - 500 ohm
	Power selection 4	10 W - 1000 ohm
Standard compliance	Power selection 5	5 W - 2000 ohm
	Safety agency	CE compliant, UL 1480A



CMR 60T

TWO-WAY CEILING MONITOR SPEAKER

Physical specifications

Cabinet/Case Material	ABS
Hardware	Steel backcan
Grille	Steel
Color	White - RAL 9003
Depth	202 mm / 7.95 inches
Recessed Depth	193 mm / 7.6 inches
Diameter	300 mm / 11.81 inches
Cut out diameter	260 mm / 10.24 inches
Weight	4.5 kg / 9.92 lbs

Size / Weight

Rigging / Mounting

ACCESSORIES

FLYING BRACKETS

13360490	MUD RING 4X CMR	EAN 8024530019396
13360489	TILE BRIDGE 4X CMR	EAN 8024530019389

GRILLE

13360492	GRILLE KIT 4X CMR B	Black - RAL 9005	EAN 8024530019402
----------	---------------------	------------------	-------------------