



WMR 60T

TWO-WAY WALL-MOUNT MONITOR SPEAKER




Description	WMR 60T is a multi-purpose two-way wall-mounted speaker, suitable for a wide range of applications. Thanks to its elegant and discreet design and accurate details, WMR60T pairs any building's aesthetic. The high-quality transducers guarantee a precise music reproduction of the entire frequency band and provide impressive sound pressure levels for such a compact enclosure. The installation is easy thanks to the dedicated connection board inside the (included) wall mount support, which allows the installer to set the desired tilt first, fix the speaker, and finally connect it without the need for any tooling.		
Features	› 80W RMS power handling › 114 dB max SPL › 70 ÷ 20000 Hz frequency range › 140° x 100° constant directivity coverage angle › 6.5" high power woofer › 1" neodymium dome tweeter › Self-extinguishing plastic cabinet and aluminum front grille › Connection board integrated into the wall support › 4 pole EUROBLOCK connector (audio input and parallel link output) › IP55 protection grade		
Part Number	13100050 WMR 60T 13100071 WMR 60T W	Black - RAL 9005 White - RAL 9003	EAN 8024530017453 EAN 8024530020026



WMR 60T

TWO-WAY WALL-MOUNT MONITOR SPEAKER

Line Art 2D

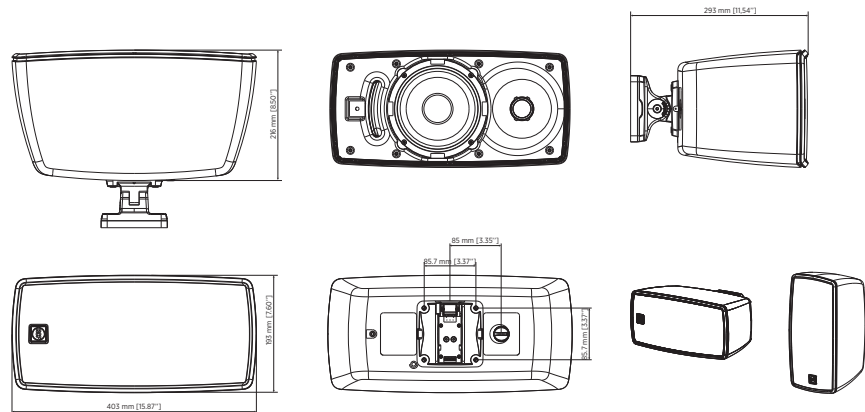

TECHNICAL SPECIFICATIONS

Acoustical specifications	Frequency Response (-10dB)	70 Hz - 20000 Hz
	Max SPL @ 1m	114 dB
	Horizontal coverage angle	140°
	Vertical coverage angle	100°
	System Sensitivity	89 dB
Power section	Amplification	Full Range
	Nominal Impedance	8 ohm
	Power Handling	80 W RMS
	Peak Power Handling	320 W PEAK
	Protections	Bulb lamp
	Crossover Frequencies	2500
	Recommended Amplifiers	XPS SERIES, KPS SERIES, DMA SERIES
Transducers	Dome Tweeter	1 x 1.0" neo, 1.0" v.c
	Woofer	1 x 6.5", 1.2" v.c
Input/Output section	Input connectors	Euroblock
	Output connectors	Euroblock
	Constant Voltage Transformer	70/100 V
	Power selection 1	80 W - 125 ohm
	Power selection 2	40 W - 250 ohm
	Power selection 3	20 W - 500 ohm
Standard compliance	Power selection 4	10 W - 1000 ohm
	Power selection 5	5 W - 2000 ohm
	IP protection grade	IP 55
	Safety agency	CE compliant, UL 1480A



WMR 60T

TWO-WAY WALL-MOUNT MONITOR SPEAKER

Physical specifications	Cabinet/Case Material	ABS
	Hardware	Wall mount bracket
	Grille	Steel
	Color	Black - RAL 9005, White - RAL 9003
Size / Weight	Height	403 mm / 15.87 inches
	Width	193 mm / 7.6 inches
	Depth	293 mm / 11.54 inches
	Weight	6 kg / 13.23 lbs