


SnapShow

SWP-BT
USB Button Sender

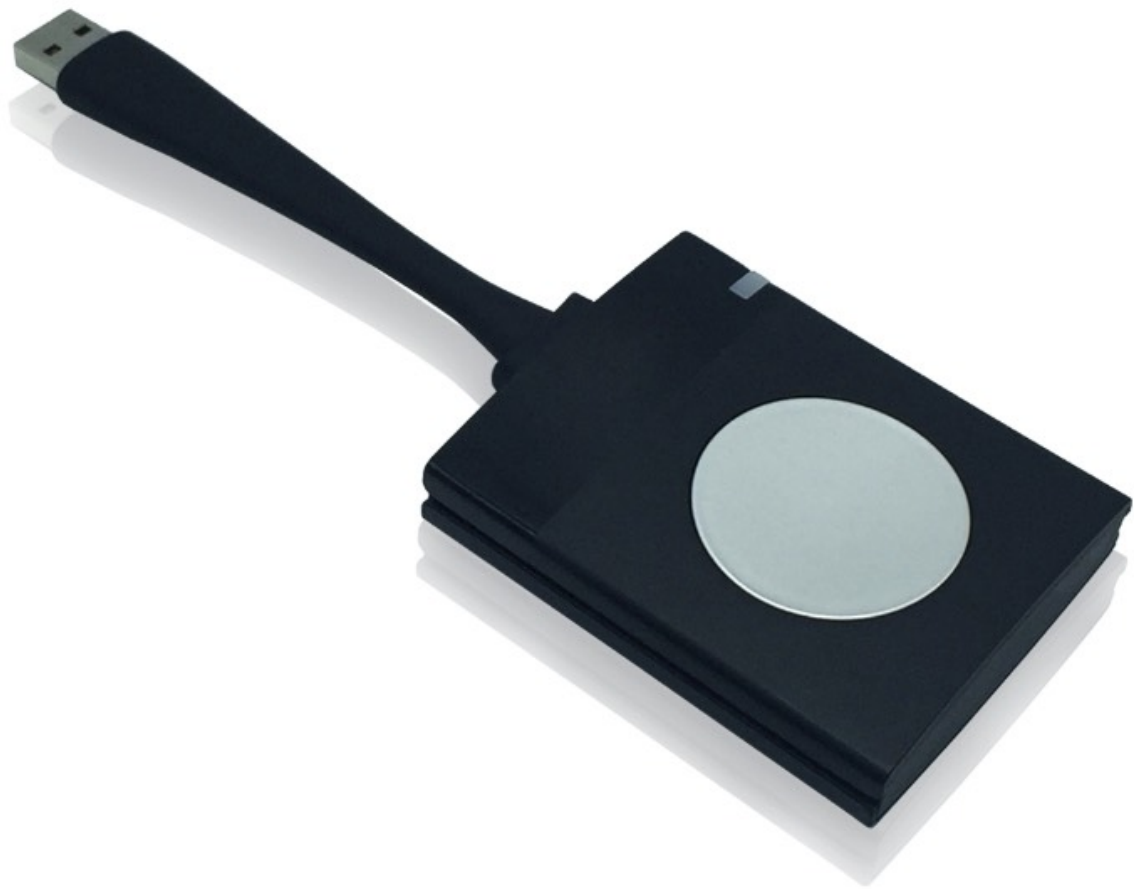

SPECIFICATION

Technical Specifications	
inteface	TYPE A USB2.0 X 1 Power supply, audio and video transmission, pairing upgrade, and touch panel back control through
Supported operating systems	Windows 7/8.1/10 32 and 64-bit MAC OS X 10.10/10.11/10.12/10.13 and above
Supported wireless receivers	All SnapShow receivers can be paired and support through
Video input resolution	Up to 3840x2160
Encoding resolution/frame rate	Up to 1920x1080 FPS30
Encoding format	H.264
audio	44.1KHz/16bit PCM, stereo
Wireless transmissinon protocol	IEEE 802.11ac/802.11n
Wireless transmissinon distance	Up to 30 meters of line-of-sight (the actual distance is also related to the antenna at the receiving end).
Wireless transmissinon band	5G & 2.4G
Wireless encryption protocol	WPA2-PSK
Wireless connection	Insert button to PC USB port for connecting automatically, run automatically, and share with click the button away. No software app installed required on PC, no need to connect throung computer Wi-Fi
Connection time	Plug in USB port to connecting successfully < 10 seconds
Transmission delay	Average delay < 150mS

Reverse control mode	Support WIN computer 10 figure touch points back control Support MAC computer 1 single figure point back control
Power/power consumption	5V/500mA, average power consumption 1.5W.
size	62mm x 62mm x 16mm
Temperature range	Operation: + 5 °C ~ + 40°C Storang: -20°C ~ + 60 °C
Humidity range	Opreation & Storage: 0 ~ 90% relative humidity, non-condensing