

CAMLIVE™ PRO 4K 4-Input HDMI to USB Video Switcher UC3430


The CAMLIVE PRO 4K (UC3430) 4-Input HDMI to USB Video Switcher captures up to four 4K @ 60 HDMI inputs, enabling users to mix dual video signals into one single stream while supporting multiple output options, including 4K @ 60 HDMI PGM / Loop-through for multiview screen purposes and 4K @ 30 USB-C output for live broadcast on the Internet. The USB-C output supports popular streaming software including Zoom, Microsoft Teams, Youtube, Facebook, GoToWebinar, Open Broadcaster, XSplit Broadcaster, and Twitch on Windows and Mac. Plus, the CAMLIVE PRO 4K features audio mixer functionalities to mix up to 4 HDMI audios and 1 line-level audio for users to add live narration / music to the content, boosting the production value of your creation.

When working with the intuitive ATEN OnAir Lite app, users can remotely control device settings in real-time, from multiple AV source switching / mixing, content cropping / resizing, layout to transitions. Apart from the versatile transition effects, the PiP / PbP / PoP functions and the support for Chroma Key help users create a dynamic presentation that will never bore the audience. In order to amplify brand identity, users are allowed to add logos in PNG / BMP / JPG format to the content. Apart from the app, the CAMLIVE PRO 4K is also controllable through its front panel pushbuttons and RJ-45 port for serial control via ATEN VK Control System.

The CAMLIVE PRO 4K works with a rack mount kit (sold separately) to give installation flexibility in media cabinets or DIT stations. With the switcher's one-stop programming and streaming functionalities that work on Windows / Mac platforms, multi-camera streaming in scenarios in need of sharp, vivid UHD quality such as multi-cam studios, corporate conferences, lecture halls, houses of worship, and live events, has never been so easy.



HDMI™
HIGH-DEFINITION MULTIMEDIA INTERFACE



Front View




Rear View



Features

- Captures 4 channels of 4K @ 60 HDMI, mixes and switches the streams while providing audio mixer functionalities and seamless transition for pro-level broadcasting
- Multiple output options:
 - HDMI PGM / Loop-through at 4K @ 60 for multiview screen purposes
 - USB-C output 4K @ 30 for live broadcast on the Internet
- Built-in audio mixer - mixes up to 4 HDMI audios and 1 line-level audio for adding live narration / music to the content
- Versatile control methods via the front panel pushbuttons, RJ-45 port for serial control via ATEN VK Control System, and ATEN OnAir Lite app
- ATEN OnAir Lite app — users can remotely control device settings in real-time, including multiple AV source switching / mixing, content cropping / resizing, layout options (full screen / PiP / PbP / PoP), transitions, Chroma Key, and logo adding
- Compatible with popular streaming software including Zoom, Microsoft Teams, Youtube, Facebook, GoToWebinar, Open Broadcaster, XSplit Broadcaster, and Twitch
- Supports UVC / UAC v1.1
- Plug-and-Play functionality with USB-C 3.2 Gen 1 compliance
- Works with major operating systems: Windows® and Mac OS X®

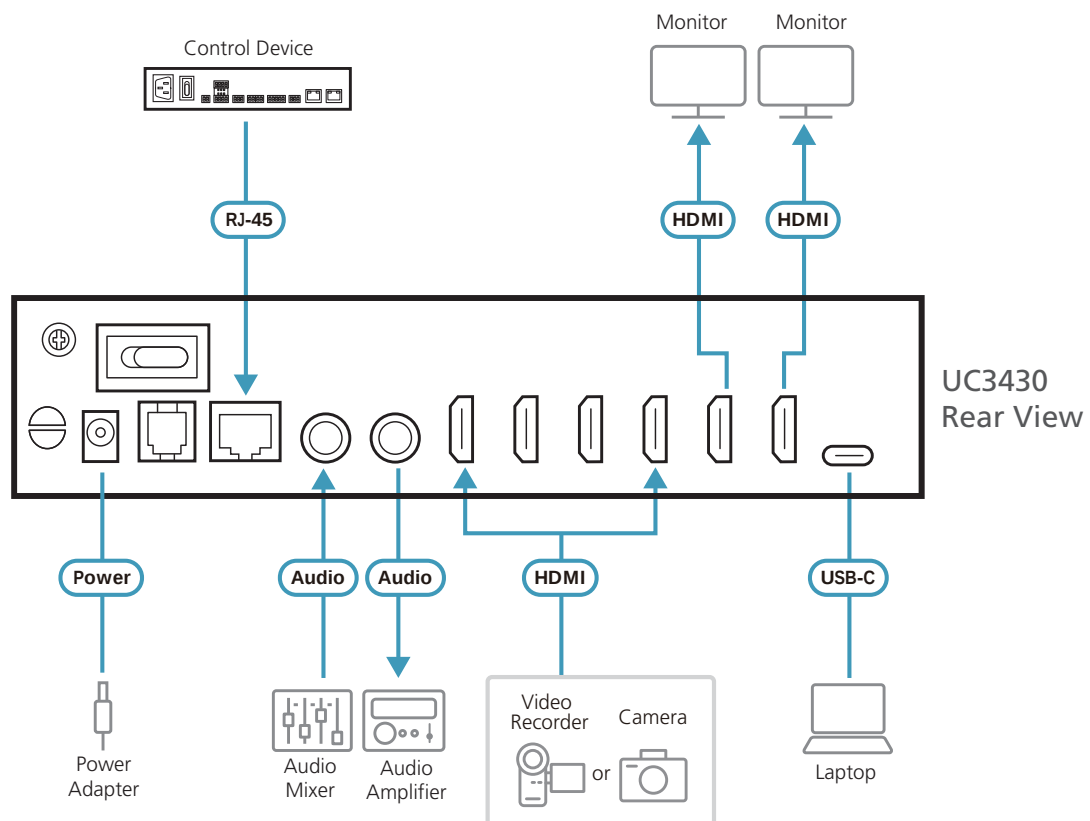

Specifications

CAMLIVE™ PRO 4K	
Connectors	
Video In	4 x HDMI Type A Female (Black) (HDMI TMDS compatible and without the support of FRL/VRR/ALLM/eARC. Up to max. input video resolution 3840 x 2160p60 including stereo audio signals only.)
USB Port	1 x USB-C 3.2 Gen1 Male (Black) (USB-C to USB-C and USB-C to USB Type-A cables are supplied in the package)
Video Output	1 x HDMI Type A Female (PGM Video, Black) 1 x HDMI Type A Female (Loop-Thru Video, Black)
Audio Inputs	1x unbalanced audio via 6.35mm TRS connectors (Black)
Audio Outputs	1x unbalanced audio via 6.35mm TRS connectors (Black)
Video Resolution	Video input: 720p50, 720p60, 1080p25, 1080p30, 1080p50, 1080p60 4096 x 2160 25p/30p/60p, 3840 x 2160 25p/30p/60p, HDMI unencrypted
Audio Sampling	16-bit PCM encoded audio at 44.1KHz and 48KHz sampling rates
Output	PGM HDMI video out: 720p: 1280 x 720 25p/30p/50p/60p 1080p: 1920 x 1080 24p/25p/30p/50p/60p 2160p: 3840 x 2160 24p/25p/30p/50p/60p, HDMI unencrypted Uncompressed USB video (UVC) stream with audio(UAC) 720p: 1280 x 720 25p/30p/50p/60p 1080p: 1920 x 1080 24p/25p/30p/50p/60p 2160p: 3840 x 2160 24p/25p/30p (Uncompressed video stream is only available on USB 3.1 connection.)
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 - 80 % RH, Non-Condensing
Minimum Hardware Requirements	PC/Mac: CPU: Intel® i3 Dual Core 2.8Ghz or above RAM: 4GB or more One USB-C interface or USB Type-A interface
Control	
Contact In	RS-232 connection via RJ-45 interface
RS-232	Flow Control: RTS/CTS, XON/XOFF FIFO: 64 bytes Baud rate: 50bps ~921.6Kbps Stop bit: 2 stop bits (9600 8N2) OR 1 stop bit (1, 1.5, 2) Parity: no parity Signal: TxD, RxD, RTS, CTS, DTR, DSR, GND
USB	Support ATEN OnAir Lite App, App downloadable from Microsoft Store
OS Support	Windows 10 and above with UVC/UAC v1.1 support Mac OS X 10.13 and above with UVC/UAC support
Physical Properties	
Housing	Metal
Weight	1.03 kg
Dimensions (L x W x H)	20 x 16.46 x 4.4 cm

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan
Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 12/2023 V1.0

© Copyright 2023 ATEN® International Co., Ltd.
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners.
The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.

