

PC-PE1868IP1

IP POWERED CEILING MOUNT SPEAKER



The PC-PE1868IP1 is an IP PoE ceiling speaker and can receive the broadcast from other terminals or servers supporting the setting of functions through browser. It can detect circuit faults and operating state of the speaker and display them on the server software.


Key features

- Quick installation with power over Ethernet
- Flexible system expansion where network connection is available
- Different product options satisfying indoor & outdoor application

Specifications

Power Source	DC 24V/1A or PoE (IEEE 802.3at)
Power Consumption	Less than 5W (static Power)
Amplifier Rated Output	2*7W (Maximum Consumption Current 24V/0.65A under DC Condition) 2*7W (Maximum Consumption Current 16V/1.35A under PoE Condition)
Frequency Response	100 - 18,000 Hz
Sensitivity	90dB (1m/1W)
Network I/F	10 BASE-T/100BASE-TX, Auto negotiation
Network Protocol	UDP, ARP, HTTP, ICMP, IGMP
Operating Temperature	-20 °C to +50 °C
Finish	Baffle: ABS resin, off-white Grille: Steel net, off-white (RAL 9010 or equivalent color), paint
Dimensions	Ø180 x 119.7(D) mm
Weight	0.73kg
Included Accessories	Mounting brackets x1, 4P terminal block x1

Dimensions

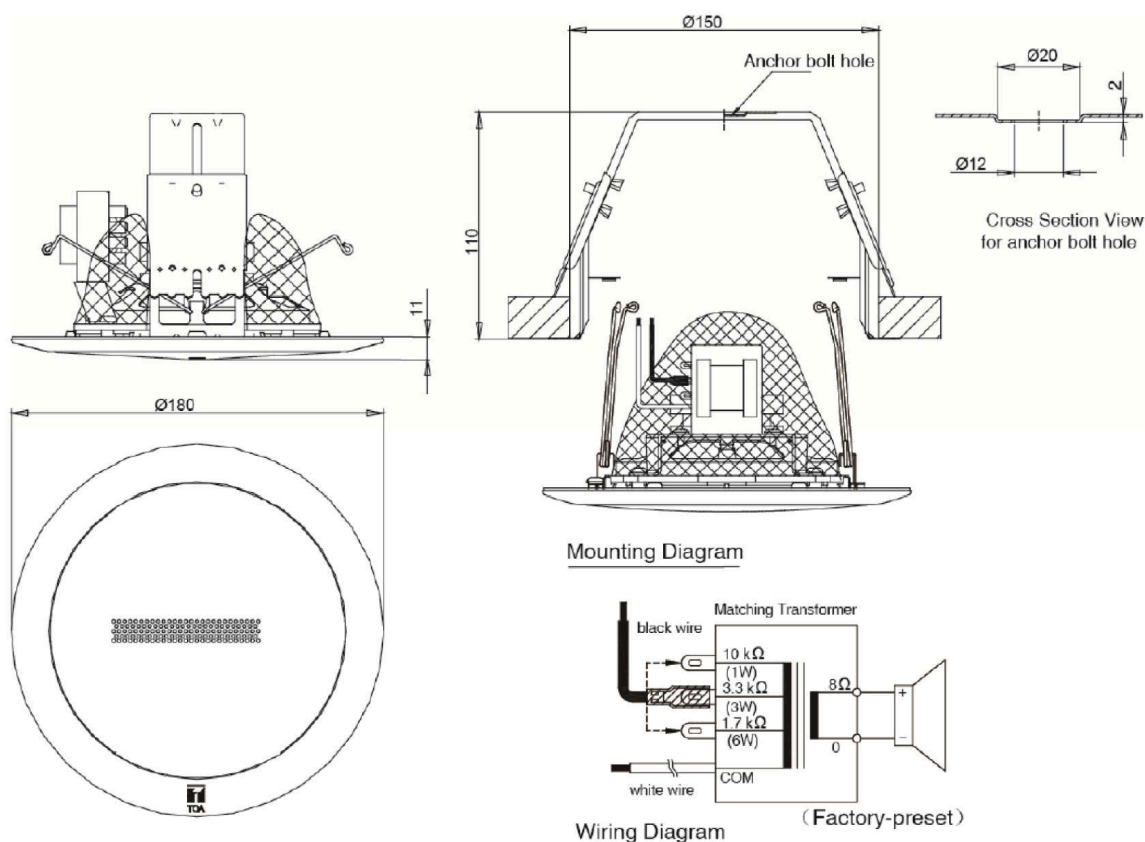

UNIT : mm SCALE : 1 / 3

[Note] Use transformer terminals when changing input impedance.