

SC-PE630IP1

IP POWERED HORN SPEAKER



The SC-PE630IP1 is an IP PoE horn mount speaker and can receive the broadcast from other terminals or servers supporting the setting of functions through browser. It can detect circuit faults and operating state of the speaker and display them on the server software.


Key features

- Quick installation with power over Ethernet
- Flexible system expansion where network connection is available
- Different product options satisfying indoor & outdoor application


Specifications

Power Source	DC 24V / 1A or PoE (IEEE 802.3at)
Power Consumption	Less than 5W (Static Power)
Amplifier Rated Output	DC Power Supply: 2*7W (Maximum Consumption Current 24V/0.65A under DC Condition) PoE Power Supply: 2*7W (Maximum Consumption Current 16V/1.35A under PoE Condition)
Frequency Response	300 - 18,000 Hz
Sensitivity	113dB (1m/1W)
Network I/F	10 BASE-T/100BASE-TX, Auto negotiation
Network Protocol	UDP, ARP, HTTP, ICMP, IGMP
Dust/Water Protection	IP65
Operating Temperature	-20°C to +50°C
Operating Humidity	Below 90% RH (no condensation)
Finish	Horn: Aluminum, off-white Back cover: ABS/ PC Composite Bracket, screws and nuts: Stainless steel, dark grey
Dimensions	285(W) x 227(H) x 277(D) mm
Weight	1.95kg
Included Accessories	4P terminal block x1


Dimensions

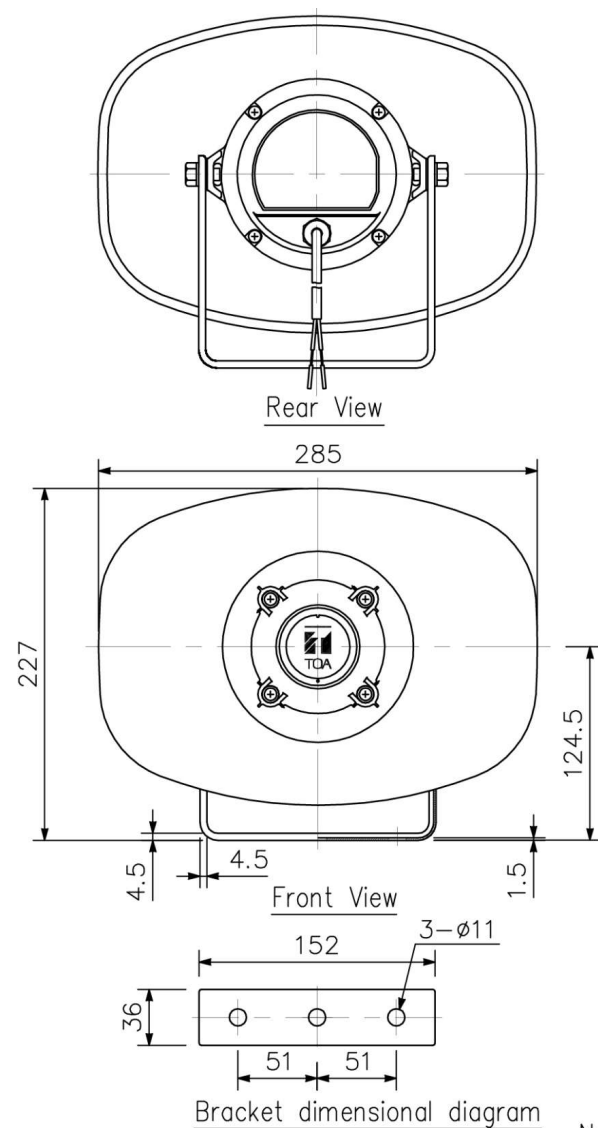

UNIT:mm SCALE:1/5



Wiring diagram

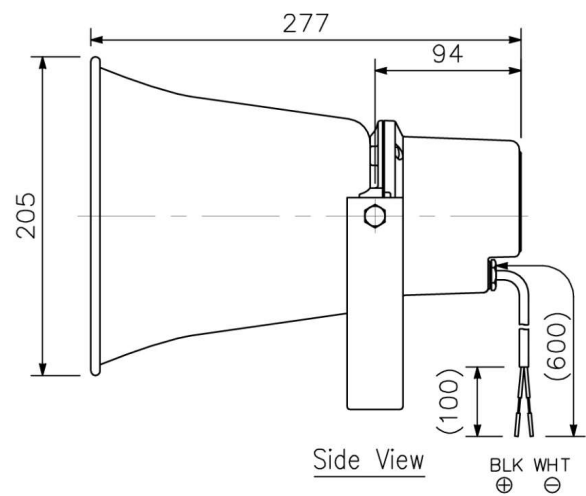

Note: Numerical values in parentheses are for reference only.