


OPERA NONA 210

QUASI 3-WAY ACTIVE SPEAKER

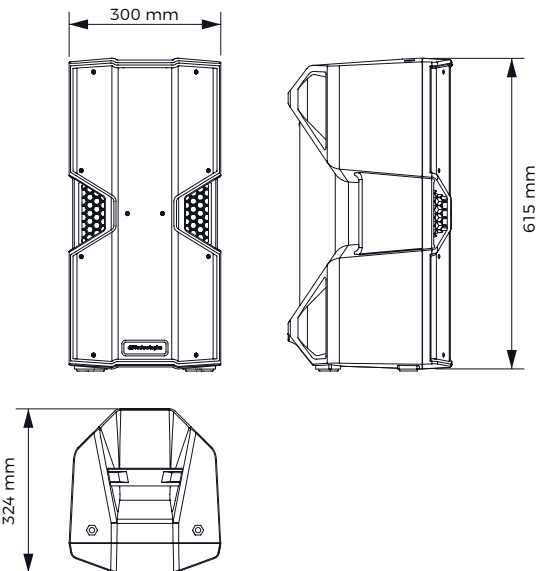

MAIN FEATURES

- True coaxial Quasi 3-way
- Dual Woofer Design
- 2-channel Input
- 1000 W RMS Class D Amplifier
- 131.5 dB Max SPL
- FIR Filters
- 3 M10 Flying Points
- 3 Handles, 1 Pole Mount
- 2 Wedge Angles

DESCRIPTION

OPERA NONA 210 is an active loudspeaker designed for live performance, DJ applications and portable PA systems. Its acoustic design combines two 10" ceramic woofers with a coaxial mid-high frequency driver, delivering high output and coherent coverage from a compact enclosure. A powerful integrated amplifier and onboard DSP optimize system performance, with seven selectable presets: Club, Vocal, Bass Reduction, Playback, Bass Boost, Wedge Vocal and Wedge Playback. Two independent inputs support direct connection of microphones, instruments and playback sources, while multiple mounting configurations and a dedicated floor-monitor angle allow OPERA NONA 210 to operate as a main PA, stage monitor or fill speaker.

ACCESSORIES


FC-NONA210
Functional
cover




RC-M1
Magnetic Rain
Cover



SK-36TT
Speaker stand
kit



WB-NONA
Horizontal or
vertical bracket



Speaker Type	Quasi 3-Way Active Speaker
Frequency Response [-10dB]	55 - 20.000 Hz
Frequency Response [- 6dB]	60 - 20.000 Hz
Max SPL	131.5 dB
HF	1" Exit, 1.4" v.c.
Directivity (HxV)	90°x60°
LF	2x 10", 2.5" v.c.
Amp Technology	Class-D Auto-range
RMS Power	1000 W (2x 500W)
Peak Power	2000 W
AD/DA Converter	24 bit/48 KHz
CrossOver Frequency	1900 Hz
Limiter	Peak, RMS, Thermal
Advanced DSP Functions	Linear Phase FIR Filters
Signal Input	2x combo XLR/jack balanced
Signal Output	1x XLR balanced
Controls	2x audio input sensitivity switch 2x level knob DSP preset rotary Ground/lift switch Output routing selector switch
Housing	Polypropylene
Grille	1.2 mm Metal
Handles	2x Side, 1x Top
Rigging Points	2x M10 on Top + 1x M10 in the Back
Pole Mount	D36 mm
Width	300 mm (11.81 in)
Height	615 mm (22.21 in)
Depth	324 mm (12.76 in)
Weight	19.2 Kg (42.3 lbs.)