
PHANTOM


ICONIC

Series

ICONIC

PH-8 V2



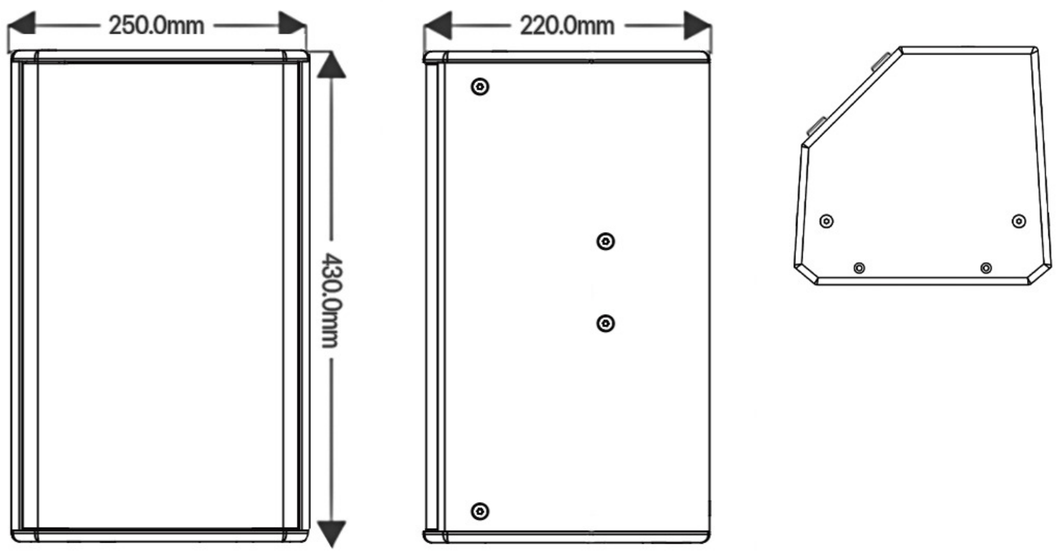

Dimension (WxDxH) : 250x220x430 mm







SPECIFICATION

Model name :	PH-8 V2
Type :	Passive Speaker
Frequency range :	90Hz-20kHz
Rated system power :	220W RMS, 440W Peak
Max. SPL :	124 db SPL PEAK
Impedance :	8 Ohms
LF transducer :	Woofer 8" Voice Coil 2 inch
HF transducer :	Voice Coil 1.75" (44mm.) HF
Dimensions (W × D × H) :	250 × 220 × 430 mm
Weight :	9.62 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE




FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM

ICONIC


PH-10 V2



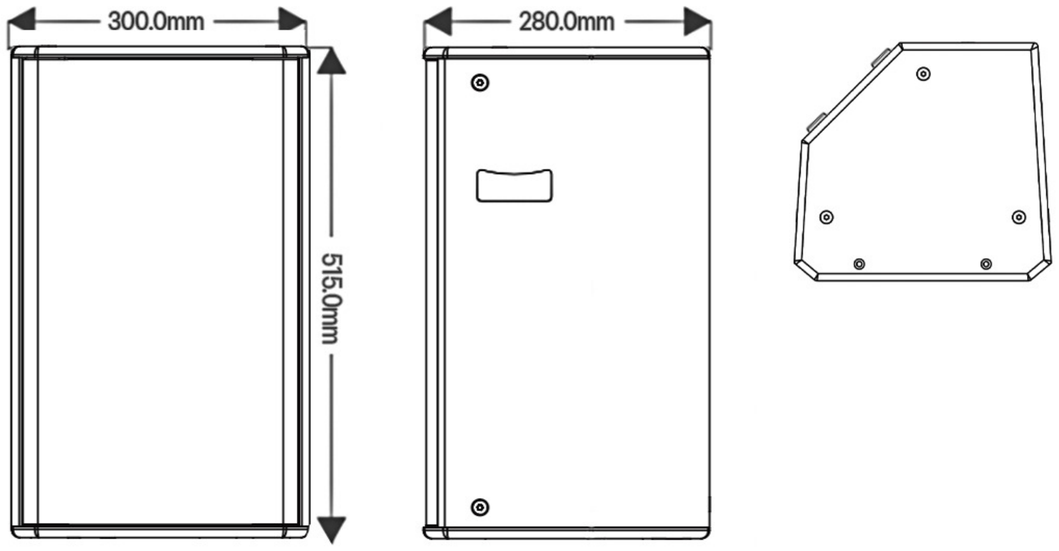

Dimension (WxDxH) : 300x280x515 mm




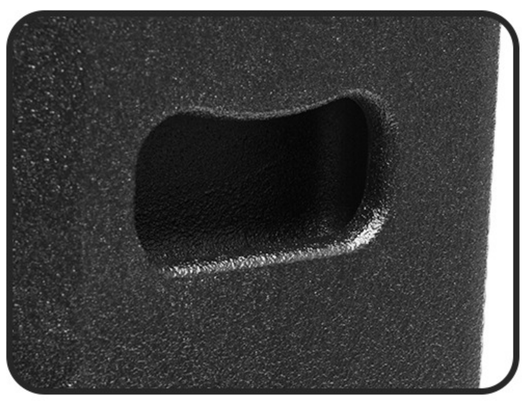


SPECIFICATION

Model name :	PH-10 V2
Type :	Passive Speaker
Frequency range :	75Hz-20kHz
Rated system power :	300W RMS, 600W Peak
Max. SPL :	128 db SPL PEAK
Impedance :	8 Ohms
LF transducer :	Woofer 10" Voice Coil 3 inch
HF transducer :	Voice Coil 1.75" (44mm.) HF
Dimensions (W × D × H) :	300 × 280 × 515 mm
Weight :	15.48 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE




FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM

ICONIC


PH-12 V2



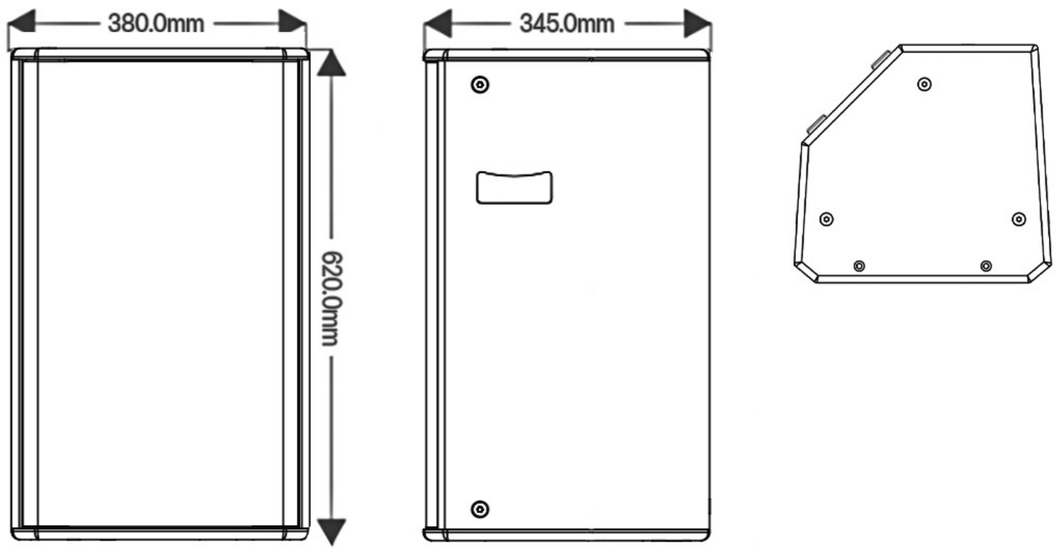

Dimension (WxDxH) : 380x345x620 mm




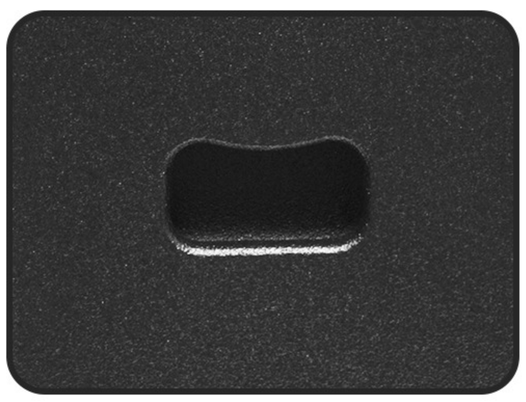


SPECIFICATION

Model name :	PH-12 V2
Type :	Passive Speaker
Frequency range :	65Hz-20kHz
Rated system power :	400W RMS, 800W Peak
Max. SPL :	133 db SPL PEAK
Impedance :	8 Ohms
LF transducer :	Woofer 12" Voice Coil 3 inch
HF transducer :	Voice Coil 1.75" (44mm.) HF
Dimensions (W × D × H) :	380 × 345 × 620 mm
Weight :	20.30 kg


TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE



FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM


ICONIC


PH-15 V2



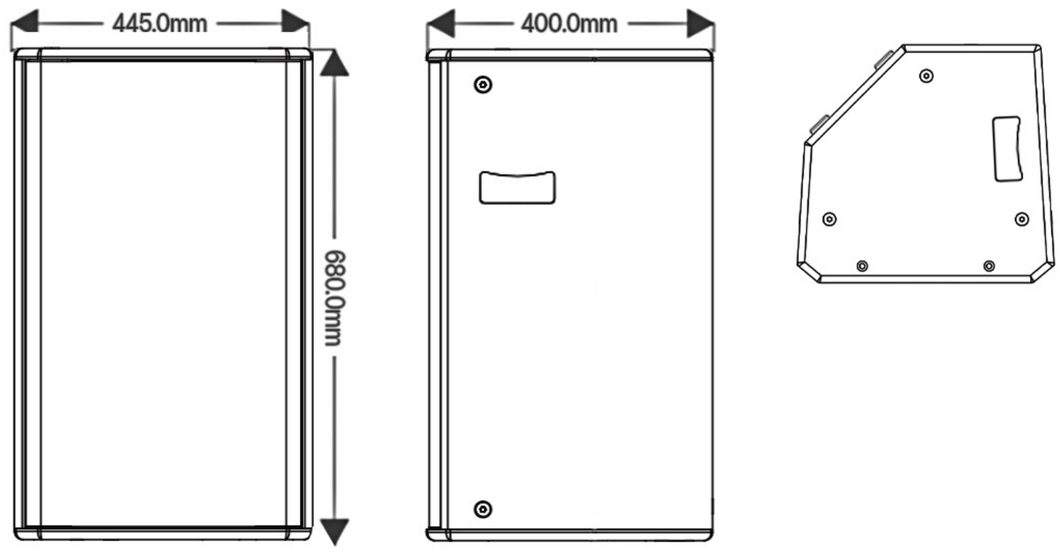

Dimension (WxDxH) : 445x400x680 mm

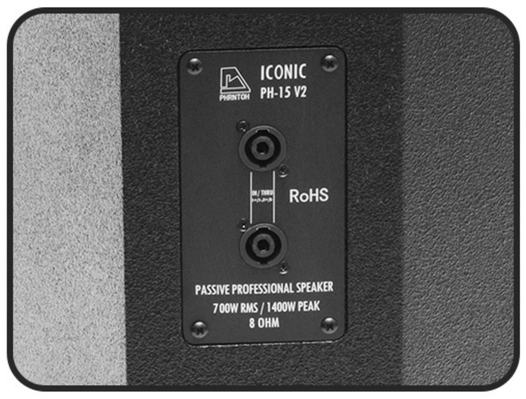


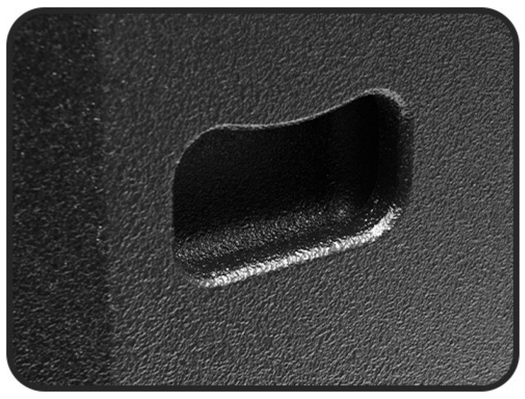

SPECIFICATION

Model name :	PH-15 V2
Type :	Passive Speaker
Frequency range :	60Hz-20kHz
Rated system power :	450W RMS, 900W Peak
Max. SPL :	135 db SPL PEAK
Impedance :	8 Ohms
LF transducer :	Woofer 15" Voice Coil 3 inch
HF transducer :	Voice Coil 1.75" (44mm.) HF
Dimensions (W × D × H) :	445 × 400 × 680 mm
Weight :	23.72 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE



FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION



KARAOKE SYSTEM


TITAN

Series

TITAN


Ti-808



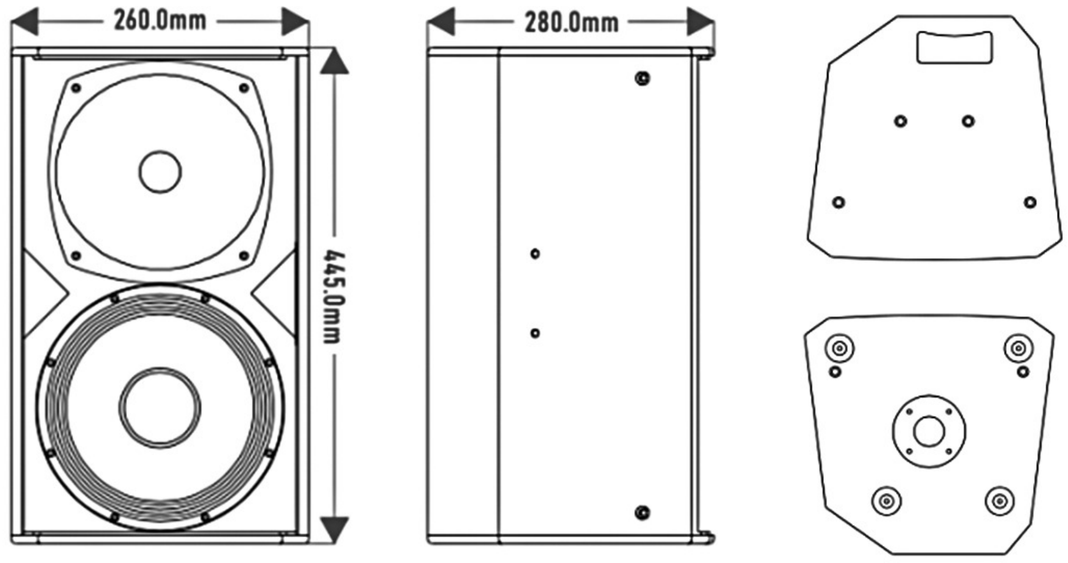

Dimension (WxDxH) : 260x280x445 mm




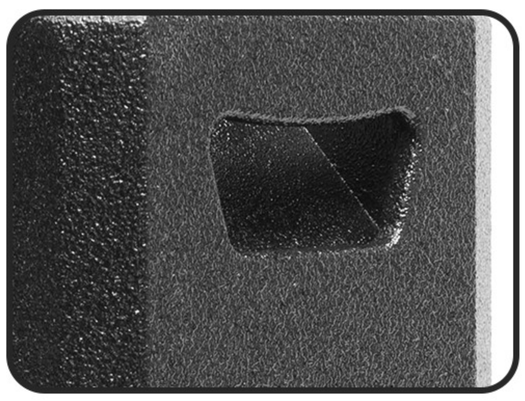


SPECIFICATION

Model name :	Ti-808
Type :	Passive Crossover
Frequency range :	68 Hz - 20 kHz
Rated system power :	200W RMS, 400W peak
Max. SPL :	123 dB SPL peak
Impedance :	4 Ohms
LF transducer :	Woofer 8" Voice Coil 2"
HF transducer :	1 × 1.7" HF
Dimensions (W × D × H) :	260 × 280 × 445 mm
Weight :	11.2 kg

TECHNOLOGY



PERFORATED STEEL GRILLE




POLYUREA COATING SURFACE



TRANSDUCER SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM

TITAN


Ti-810



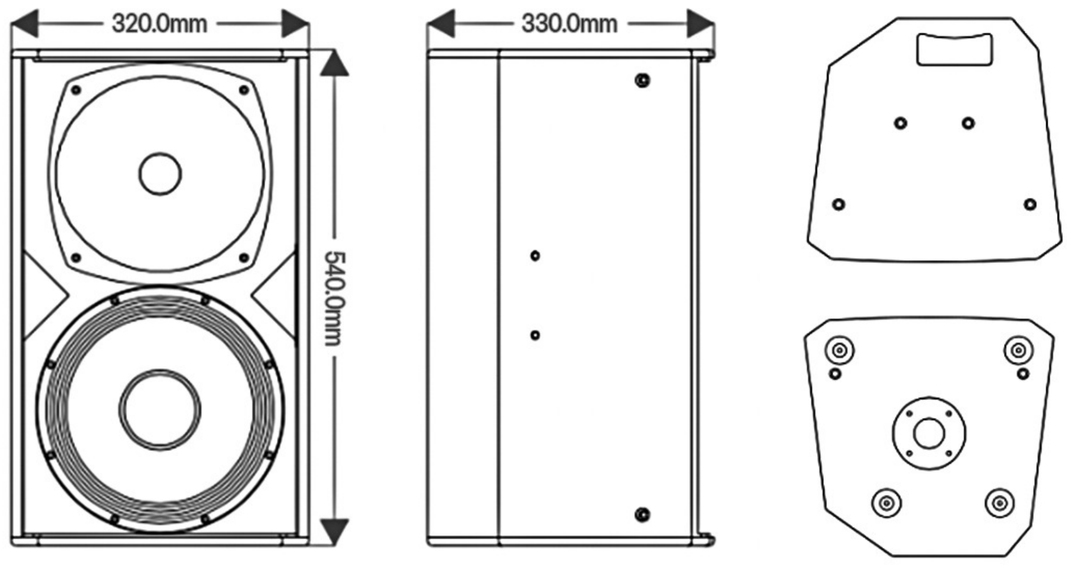

Dimension (WxDxH) : 320x330x540 mm




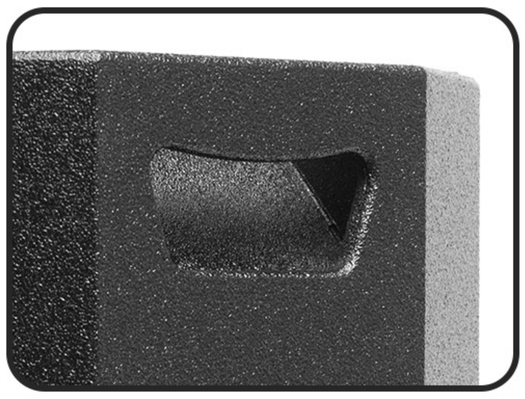

SPECIFICATION

Model name :	Ti-810
Type :	Passive Crossover
Frequency range :	60 Hz - 20 kHz
Rated system power :	250W RMS, 500W peak
Max. SPL :	125 dB SPL peak
Impedance :	4 Ohms
LF transducer :	Woofer 10" Voice Coil 2.5"
HF transducer :	1 × 1.7" HF
Dimensions (W × D × H) :	320 × 330 × 540 mm
Weight :	13.6 kg

TECHNOLOGY



PERFORATED STEEL GRILLE



POLYUREA COATING SURFACE



TRANSDUCER SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM

TITAN


Ti-812



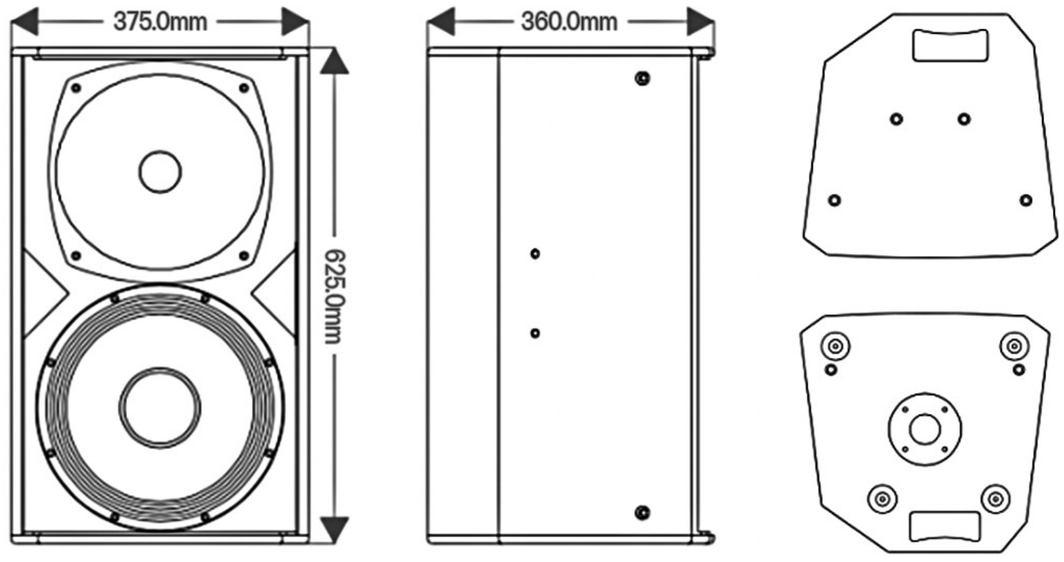

Dimension (WxDxH) : 375x360x625 mm




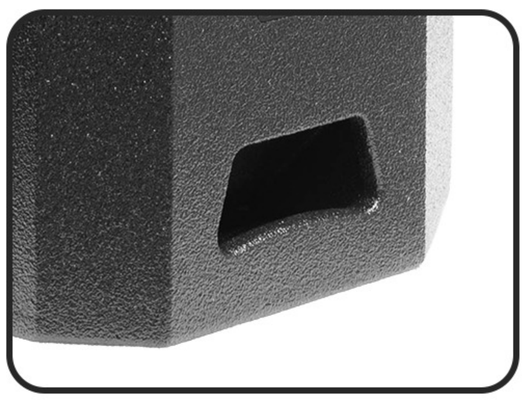


SPECIFICATION

Model name :	Ti-812
Type :	Passive Crossover
Frequency range :	55 Hz - 20 kHz
Rated system power :	350W RMS, 700W peak
Max. SPL :	130 dB SPL peak
Impedance :	4 Ohms
LF transducer :	Woofer 12" Voice Coil 3"
HF transducer :	1 × 1.7" HF
Dimensions (W × D × H) :	375 × 360 × 625 mm
Weight :	20.0 kg

TECHNOLOGY



PERFORATED STEEL GRILLE




POLYUREA COATING SURFACE



TRANSDUCER SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM




TEMPLE INSTALLATION




KARAOKE SYSTEM

TITAN


Ti-815

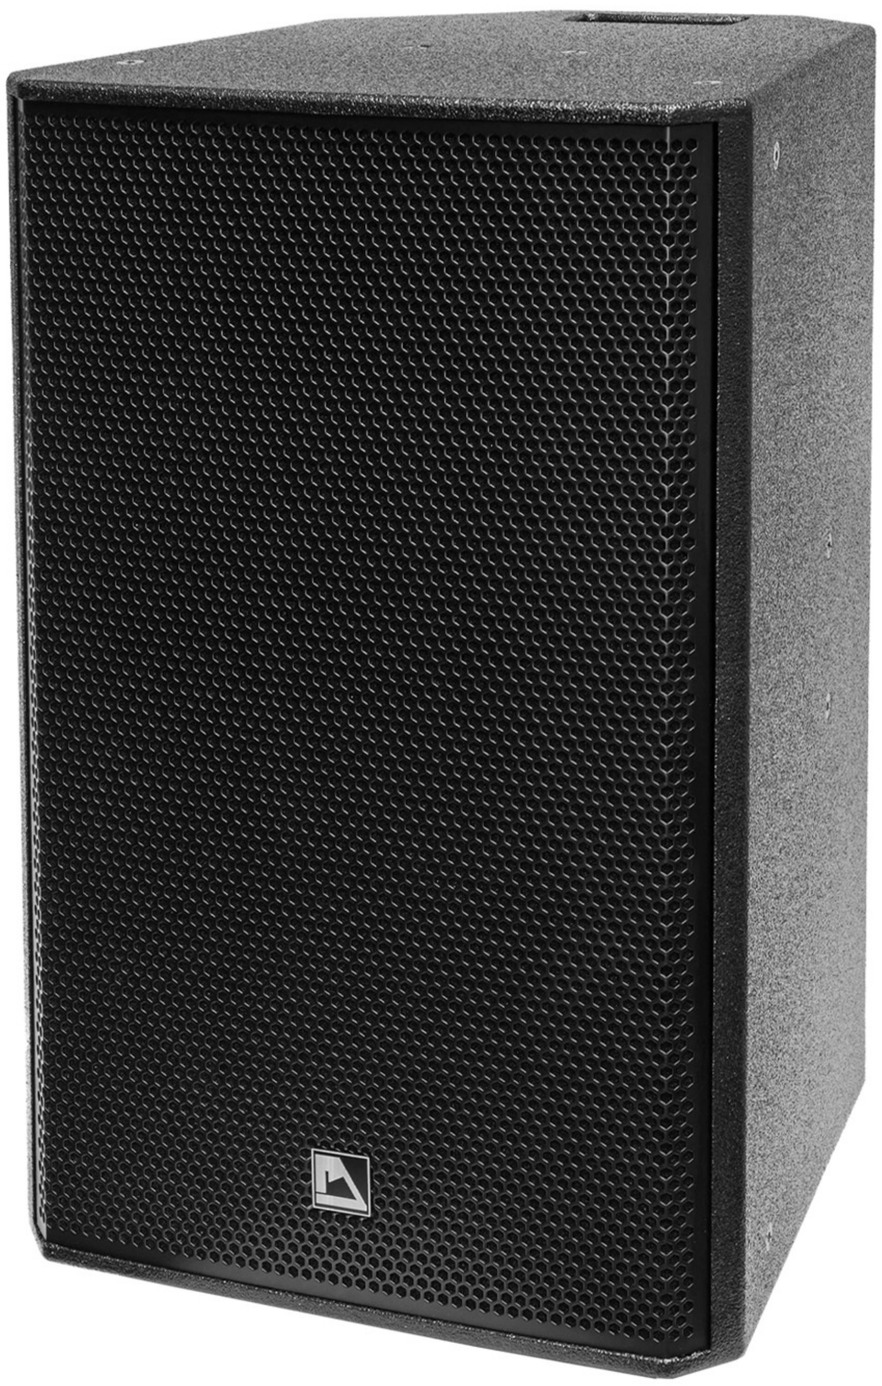

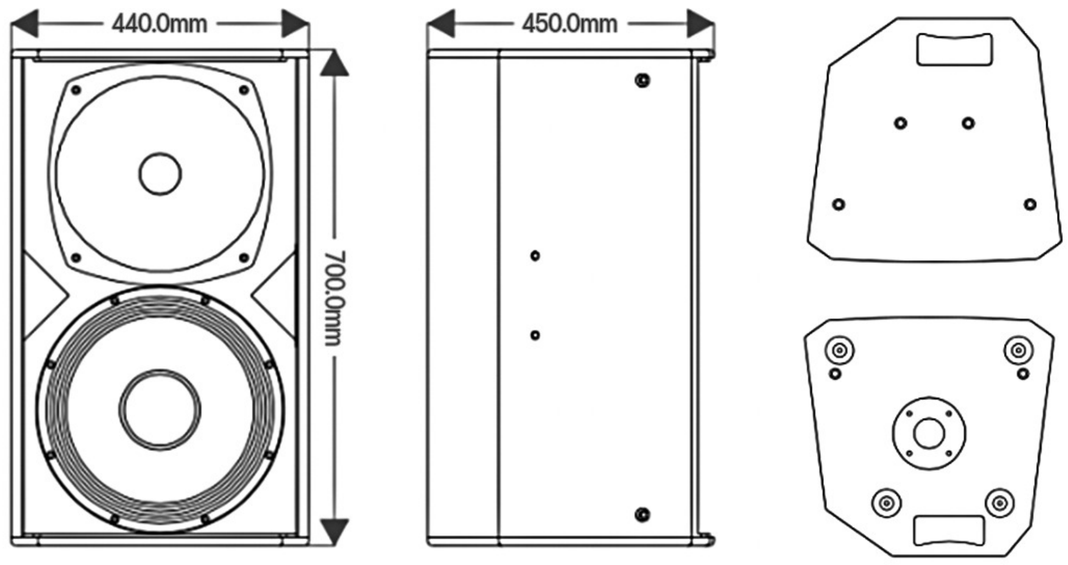

Dimension (WxDxH) : 375x360x625 mm




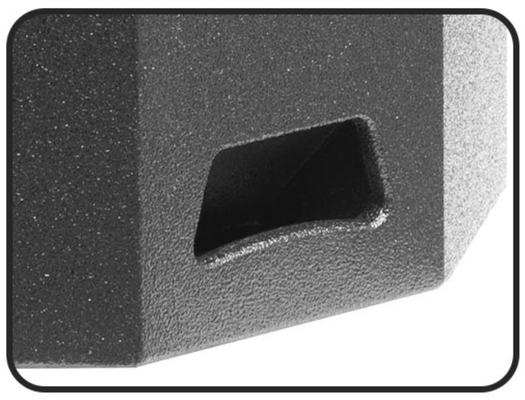

SPECIFICATION

Model name :	Ti-815
Type :	Passive Crossover
Frequency range :	46 Hz - 20 kHz
Rated system power :	450W RMS, 900W peak
Max. SPL :	132 dB SPL peak
Impedance :	4 Ohms
LF transducer :	Woofer 15" Voice Coil 3"
HF transducer :	1 × 1.7" HF
Dimensions (W × D × H) :	440 × 450 × 700 mm
Weight :	26.5 kg

TECHNOLOGY



PERFORATED STEEL GRILLE




POLYUREA COATING SURFACE



TRANSDUCER SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION



KARAOKE SYSTEM


COSMO

Series

COSMO

910P



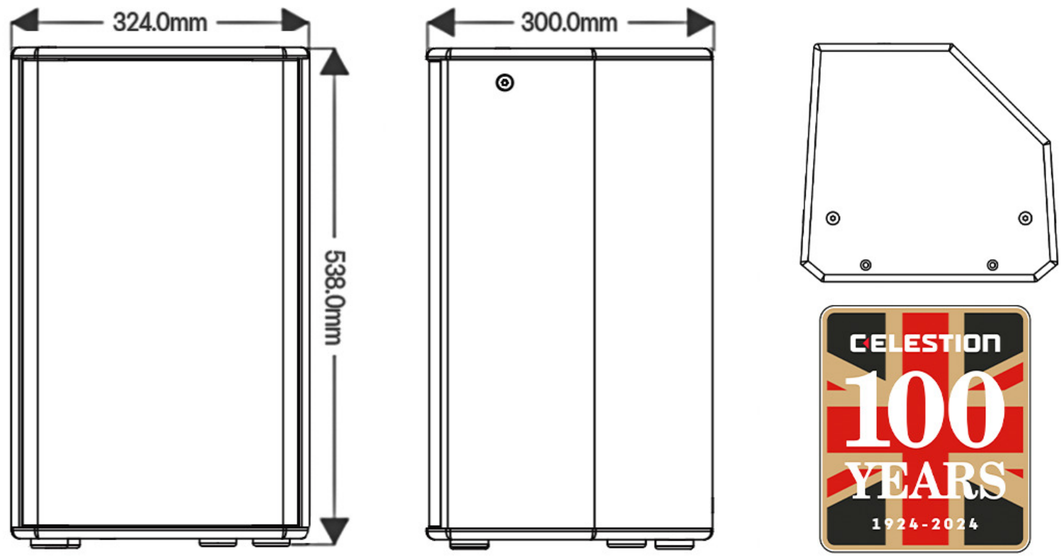

Dimension (WxDxH) : 324x300x538 mm






SPECIFICATION

Model name :	910P
Type :	Passive Two-way Loudspeaker
Frequency range :	65 Hz - 20 kHz
Rated system power :	350W AES, 1400W peak
Max. SPL :	126 dB peak
Impedance :	8 Ohms
LF transducer :	10" ferrite magnet, 2.5"voice coil
HF transducer :	1 × 1.75" By CELESTION
Dimensions (W × D × H) :	324 × 300 × 538 mm
Weight :	14.9 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE




FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION




KARAOKE SYSTEM

COSMO

912P



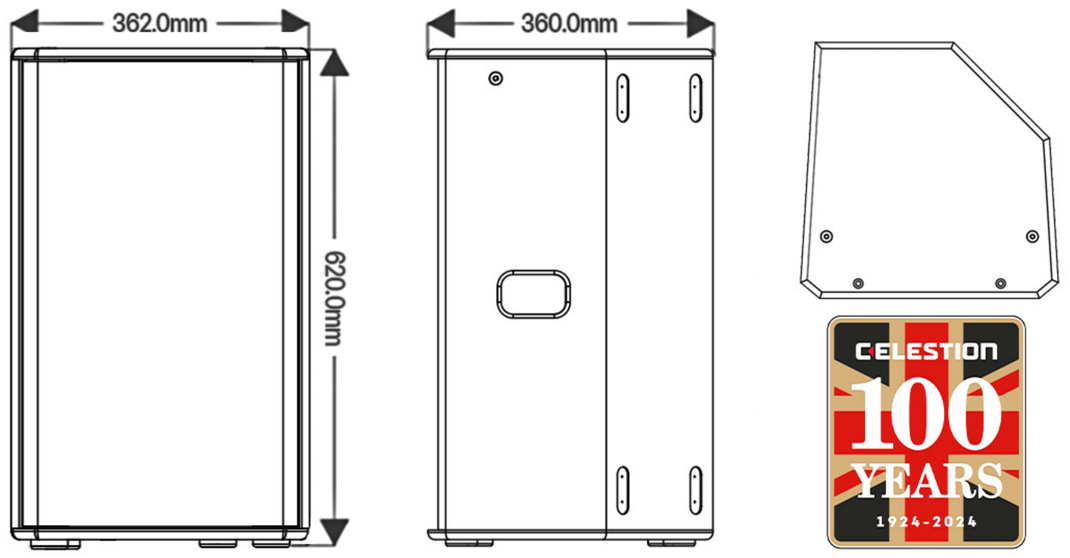

Dimension (WxDxH) : 362x360x620 mm






SPECIFICATION

Model name :	912P
Type :	Passive Two-way Loudspeaker
Frequency range :	62 Hz - 20 kHz
Rated system power :	500W AES, 2000W peak
Max. SPL :	129 dB peak
Impedance :	8 Ohms
LF transducer :	12" ferrite magnet, 3"voice coil
HF transducer :	1 × 1.75" By CELESTION
Dimensions (W × D × H) :	362 × 360 × 620 mm
Weight :	18.7 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE




FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION





KARAOKE SYSTEM

COSMO

915P



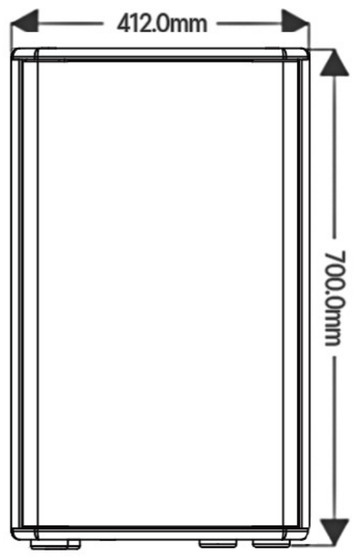


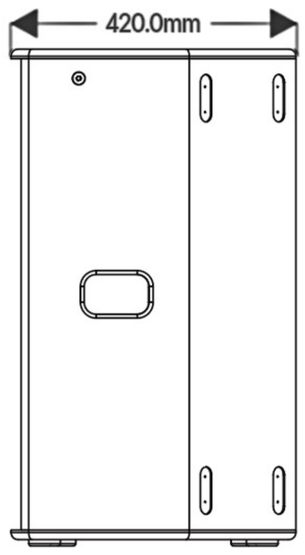



Dimension (WxDxH) : 412x420x700 mm




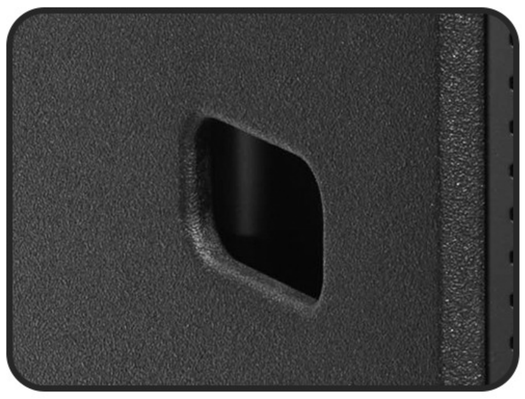

SPECIFICATION

Model name :	915P
Type :	Passive Two-way Loudspeaker
Frequency range :	58 Hz - 18 kHz
Rated system power :	500W AES, 2000W peak
Max. SPL :	132 dB peak
Impedance :	8 Ohms
LF transducer :	15" ferrite magnet, 3"voice coil
HF transducer :	1 × 1.75" By CELESTION
Dimensions (W × D × H) :	412 × 420 × 700 mm
Weight :	23.5 kg

TECHNOLOGY



CLOTH - BACKED
PERFORATED STEEL GRILLE




FINISH BLACK
POLYUREA PAINT



TRANSDUCER
SYNCHRONIZED



LIGHT WEIGHT




PLYWOOD CABINET

SUGGESTED APPLICATION



PORTABLE MAIN PA



LIVE STAGE



STAGE MONITOR



AEROBIC COURT



CLUB/RESTAURANT



MEETING ROOM



TEMPLE INSTALLATION



KARAOKE SYSTEM

AUDIO CABLE

Professional

PHANTOM

PROFESSIONAL AUDIO CABLE

ALPHA SERIES

Line Balance & MIC Balance - (OFC Class4N 99.99%)

1



MODEL **ALPHA-20**

คุณสมบัติ

- 2 คอร์
- Microphone Signal Cable
- Line Balance Cable
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x0.20 mm
- ขนาดสาย 4 mm



2



MODEL **ALPHA-22**

คุณสมบัติ

- 2 คอร์
- Microphone Signal Cable
- MIC Balance Cable
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x0.22 mm
- ขนาดสาย 6 mm



PHANTOM

PROFESSIONAL AUDIO CABLE


ALPHA SERIES

Line Balance & MIC Balance - (OFC Class4N 99.99%)

1





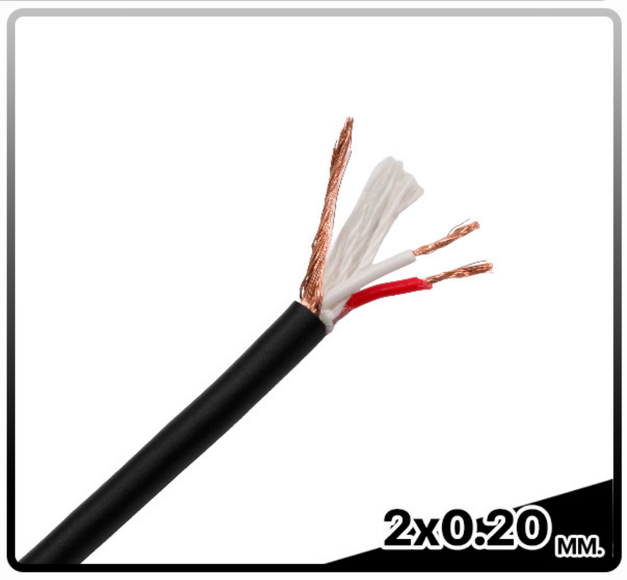

MODEL **ALPHA-20**


คุณสมบัติ

- สายสัญญาณบาลานซ์ (Balanced Signal Cable)
- ขนาดสาย 2 × 0.20 mm^2
- เส้นผ่านศูนย์กลางสาย Ø 4.0 มม.
- รองรับการส่งสัญญาณแบบสมมาตร
- ตัวนำสัญญาณ 2 แกน (2 Core)
- ตัวนำทองแดง OFC คุณภาพสูง
- ชีลด์ถักเกลียวทองแดง OFC
- ประสิทธิภาพการป้องกันสัญญาณรบกวน 94%
- ฉนวนแกนสาย XLPE ทนทาน
- เปลือกสาย PVC แข็งแรง ยืดหยุ่น
- ทนต่อรังสี UV
- เหมาะสำหรับงาน Live, Stage และงานติดตั้ง
- ใช้งานได้ทั้งภายในและภายนอกอาคาร
- โครงสร้างสายแบบกลม (Round Cable)
- รองรับอุณหภูมิการใช้งาน -25°C ถึง 70°C
- บรรจุความยาว 100 เมตร / ม้วน (100M Spool)

2





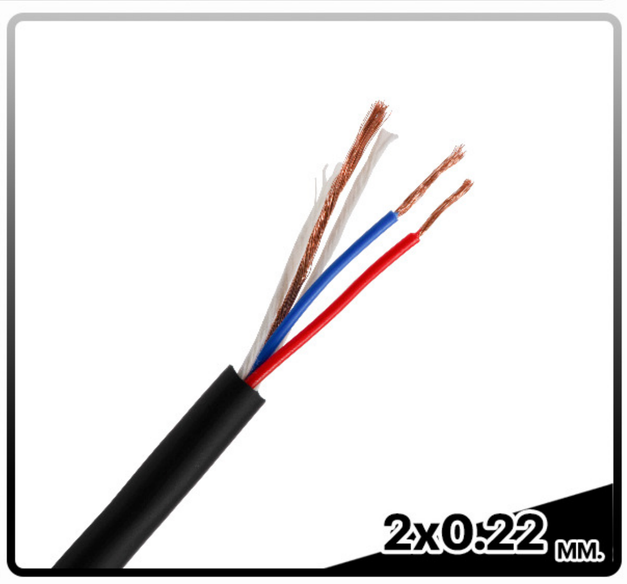

MODEL **ALPHA-22**

คุณสมบัติ

- สายสัญญาณบาลานซ์ (Balanced Signal Cable)
- ขนาดตัวนำ 2 × 0.22 mm^2
- เส้นผ่านศูนย์กลางสาย Ø 6.5 มม.
- ส่งสัญญาณแบบสมมาตร (Symmetrical Signal)
- ตัวนำสัญญาณ 2 แกน (2 Core)
- ตัวนำทองแดง OFC คุณภาพสูง
- ชีลด์ถักเกลียวทองแดง OFC
- ประสิทธิภาพการป้องกันสัญญาณรบกวน 94%
- ฉนวนแกนสาย XLPE ทนทาน
- เปลือกสาย PVC แข็งแรง ยืดหยุ่น
- ทนต่อรังสี UV
- เหมาะสำหรับงาน Live, Stage และงานติดตั้ง
- ใช้งานได้ทั้งภายในและภายนอกอาคาร
- โครงสร้างสายแบบกลม (Round Cable)
- รองรับอุณหภูมิการใช้งาน -20°C ถึง 70°C
- บรรจุความยาว 100 เมตร / ม้วน (100M Spool)

PROFESSIONAL AUDIO CABLE

PHANTOM

BETA SERIES

PA-PVC Touring Duty - (OFC Class4N 99.99%)

1



MODEL BETA-215

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- PA-PVC Touring Duty
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x1.5 mm
- ขนาดสาย 8 mm



2



MODEL BETA-225

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- PA-PVC Touring Duty
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x2.5 mm
- ขนาดสาย 9 mm



3



MODEL BETA-240

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- PA-PVC Touring Duty
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x4.0 mm
- ขนาดสาย 11 mm



4



MODEL BETA-425

คุณสมบัติ

- 4 คอร์
- Speaker Cable
- PA-PVC Touring
- OFC Class4N 99.99%
- ขนาดตัวนำ 4x2.5 mm
- ขนาดสาย 12 mm



PROFESSIONAL AUDIO CABLE

PHANTOM

BETA SERIES

PA-PVC Touring Duty - (OFC Class4N 99.99%)

1




MODEL BETA-215

คุณสมบัติ

- ตัวนำทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- ขนาดตัวนำ 2 × 1.5 mm^2
- เปลือกสาย PA-PVC Touring Duty แข็งแรง ทนทาน
- เส้นผ่านศูนย์กลางสาย Ø 8.5 มม.
- ทนต่อรังสี UV ใช้งานได้ทั้งภายในและภายนอกอาคาร
- เหมาะสำหรับงาน Mobile Live และ Stage

2

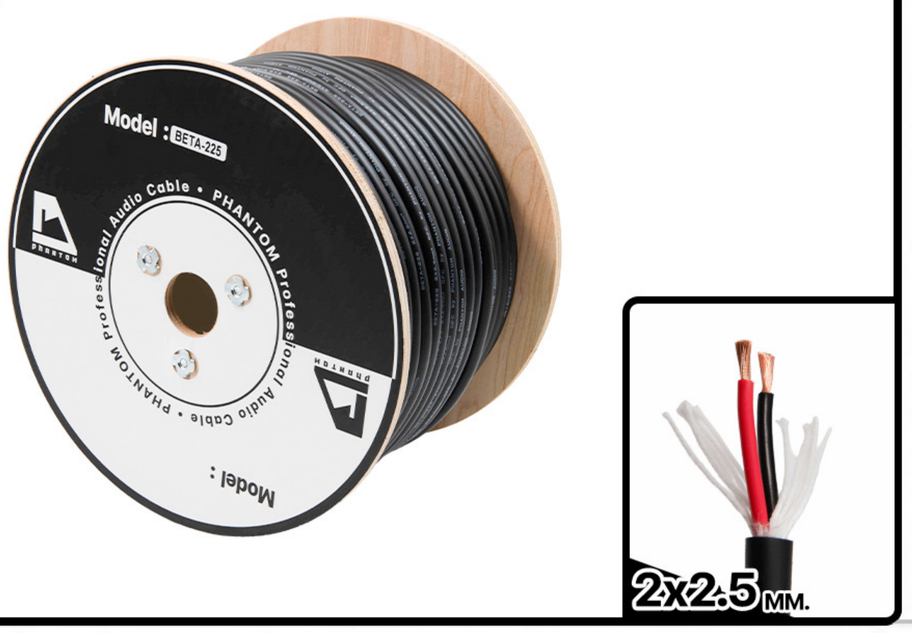

MODEL BETA-225

คุณสมบัติ

- ตัวนำทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- ตัวนำขนาด 2 × 2.5 mm^2 รองรับกำลังขับสูง
- เปลือกสาย PA-PVC Touring Duty แข็งแรง ทนทาน
- เส้นผ่านศูนย์กลางสาย Ø 9.5 มม.
- ทนต่อรังสี UV ใช้งานได้ทั้งภายในและภายนอกอาคาร
- เหมาะสำหรับงาน Mobile Live และ Stage

3




MODEL BETA-240

คุณสมบัติ

- ตัวนำทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- ตัวนำขนาด 2 × 4.0 mm^2 รองรับกำลังขับสูง
- เปลือกสาย PA-PVC Touring Duty แข็งแรง ทนทาน
- เส้นผ่านศูนย์กลางสาย Ø 11.2 มม.
- ทนต่อรังสี UV ใช้งานได้ทั้งภายในและภายนอกอาคาร
- เหมาะสำหรับงาน Mobile Live และ Stage

4

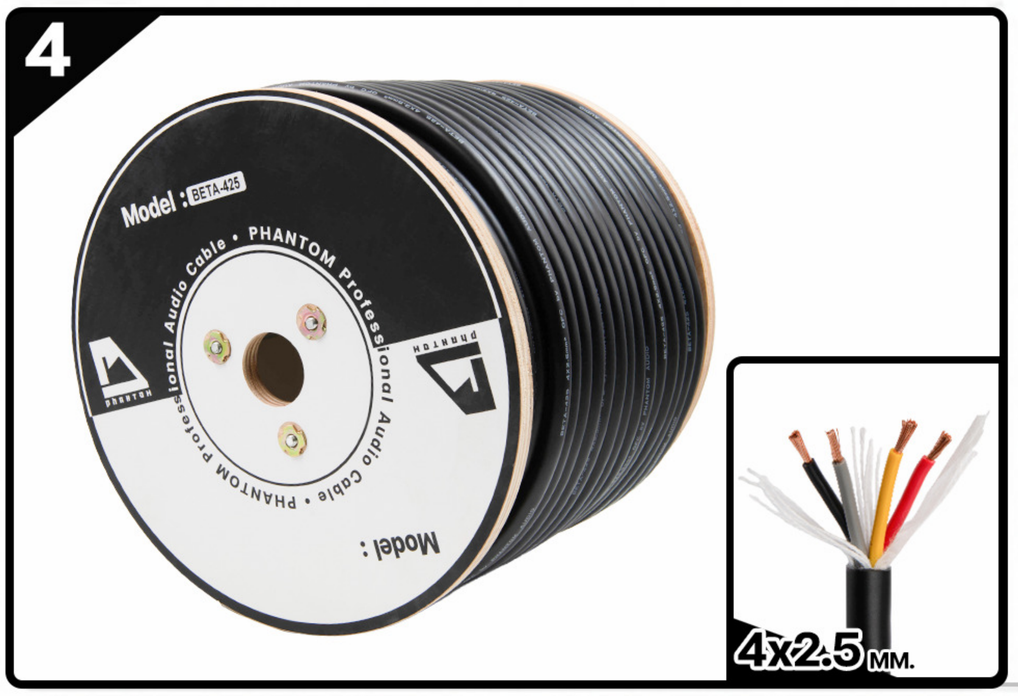

MODEL BETA-425

คุณสมบัติ

- ตัวนำทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- ตัวนำขนาด 4 × 2.5 mm^2 รองรับระบบลำโพง 4 แกน
- เปลือกสาย PA-PVC Touring Duty แข็งแรง ทนทาน
- เส้นผ่านศูนย์กลางสาย Ø 12.5 มม.
- ทนต่อรังสี UV ใช้งานได้ทั้งภายในและภายนอกอาคาร
- เหมาะสำหรับงาน Mobile Live และ Stage

PHANTOM

PROFESSIONAL AUDIO CABLE

SIGMA SERIES

US-PVC Smooth Surface - Twisted (OFC Class4N 99.99%)

1



MODEL **SIGMA-215**

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- US-PVC Smooth Surface -Twisted
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x1.5 mm
- ขนาดสาย 7 mm



2



MODEL **SIGMA-224**

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- US-PVC Smooth Surface -Twisted
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x2.5 mm
- ขนาดสาย 9 mm



3



MODEL **SIGMA-240**

คุณสมบัติ

- 2 คอร์
- Speaker Cable
- US-PVC Smooth Surface -Twisted
- OFC Class4N 99.99%
- ขนาดตัวนำ 2x4.0 mm
- ขนาดสาย 11 mm



PROFESSIONAL AUDIO CABLE

PHANTOM

SIGMA SERIES

US-PVC Smooth Surface - Twisted (OFC Class4N 99.99%)

1



MODEL SIGMA-215

คุณสมบัติ

- สายลำโพงคุณภาพสูง (Professional Speaker Cable)
- ตัวนำขนาด 2 × 1.5 mm²
- ทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- เปลือกสาย PVC ผิวเรียบ (Smooth Surface)
- เส้นผ่านศูนย์กลางสาย Ø 7.2 มม.
- โครงสร้างสายแบบบิดเกลียว (Twisted Construction)
- ทนต่อรังสี UV
- เหมาะสำหรับงาน Mobile Live, Stage และงานติดตั้ง
- ใช้งานได้ทั้งภายในและภายนอกอาคาร
- บรรจุความยาว 100 เมตร / ม้วน (100M Spool)

2



MODEL SIGMA-225

คุณสมบัติ

- สายลำโพงคุณภาพสูง (Professional Speaker Cable)
- ตัวนำขนาด 2 × 2.5 mm²
- ทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- เปลือกสาย PVC ผิวเรียบ (Smooth Surface)
- เส้นผ่านศูนย์กลางสาย Ø 9.2 มม.
- โครงสร้างสายแบบบิดเกลียว (Twisted Construction)
- ทนต่อรังสี UV
- เหมาะสำหรับงาน Mobile Live, Stage และงานติดตั้ง
- ใช้งานได้ทั้งภายในและภายนอกอาคาร
- บรรจุความยาว 100 เมตร / ม้วน (100M Spool)

3



MODEL SIGMA-240

คุณสมบัติ


- สายลำโพงคุณภาพสูง (Professional Speaker Cable)
- ตัวนำขนาด 2 × 4.0 mm²
- ทองแดง OFC Class 4N ความบริสุทธิ์ 99.99%
- เปลือกสาย PVC ผิวเรียบ (Smooth Surface)
- เส้นผ่านศูนย์กลางสาย Ø 11.5 มม.
- โครงสร้างสายแบบบิดเกลียว (Twisted Construction)
- ทนต่อรังสี UV
- เหมาะสำหรับงาน Mobile Live, Stage และงานติดตั้ง
- ใช้งานได้ทั้งภายในและภายนอกอาคาร
- บรรจุความยาว 100 เมตร / ม้วน (100M Spool)


GADGET


Other products

ICON

Speaker Stand Icon-2

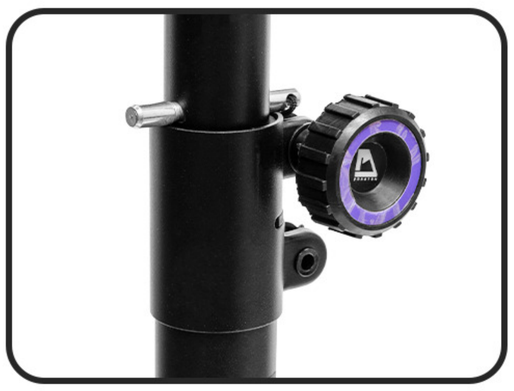

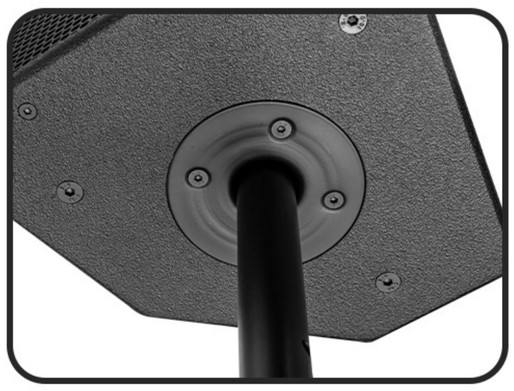

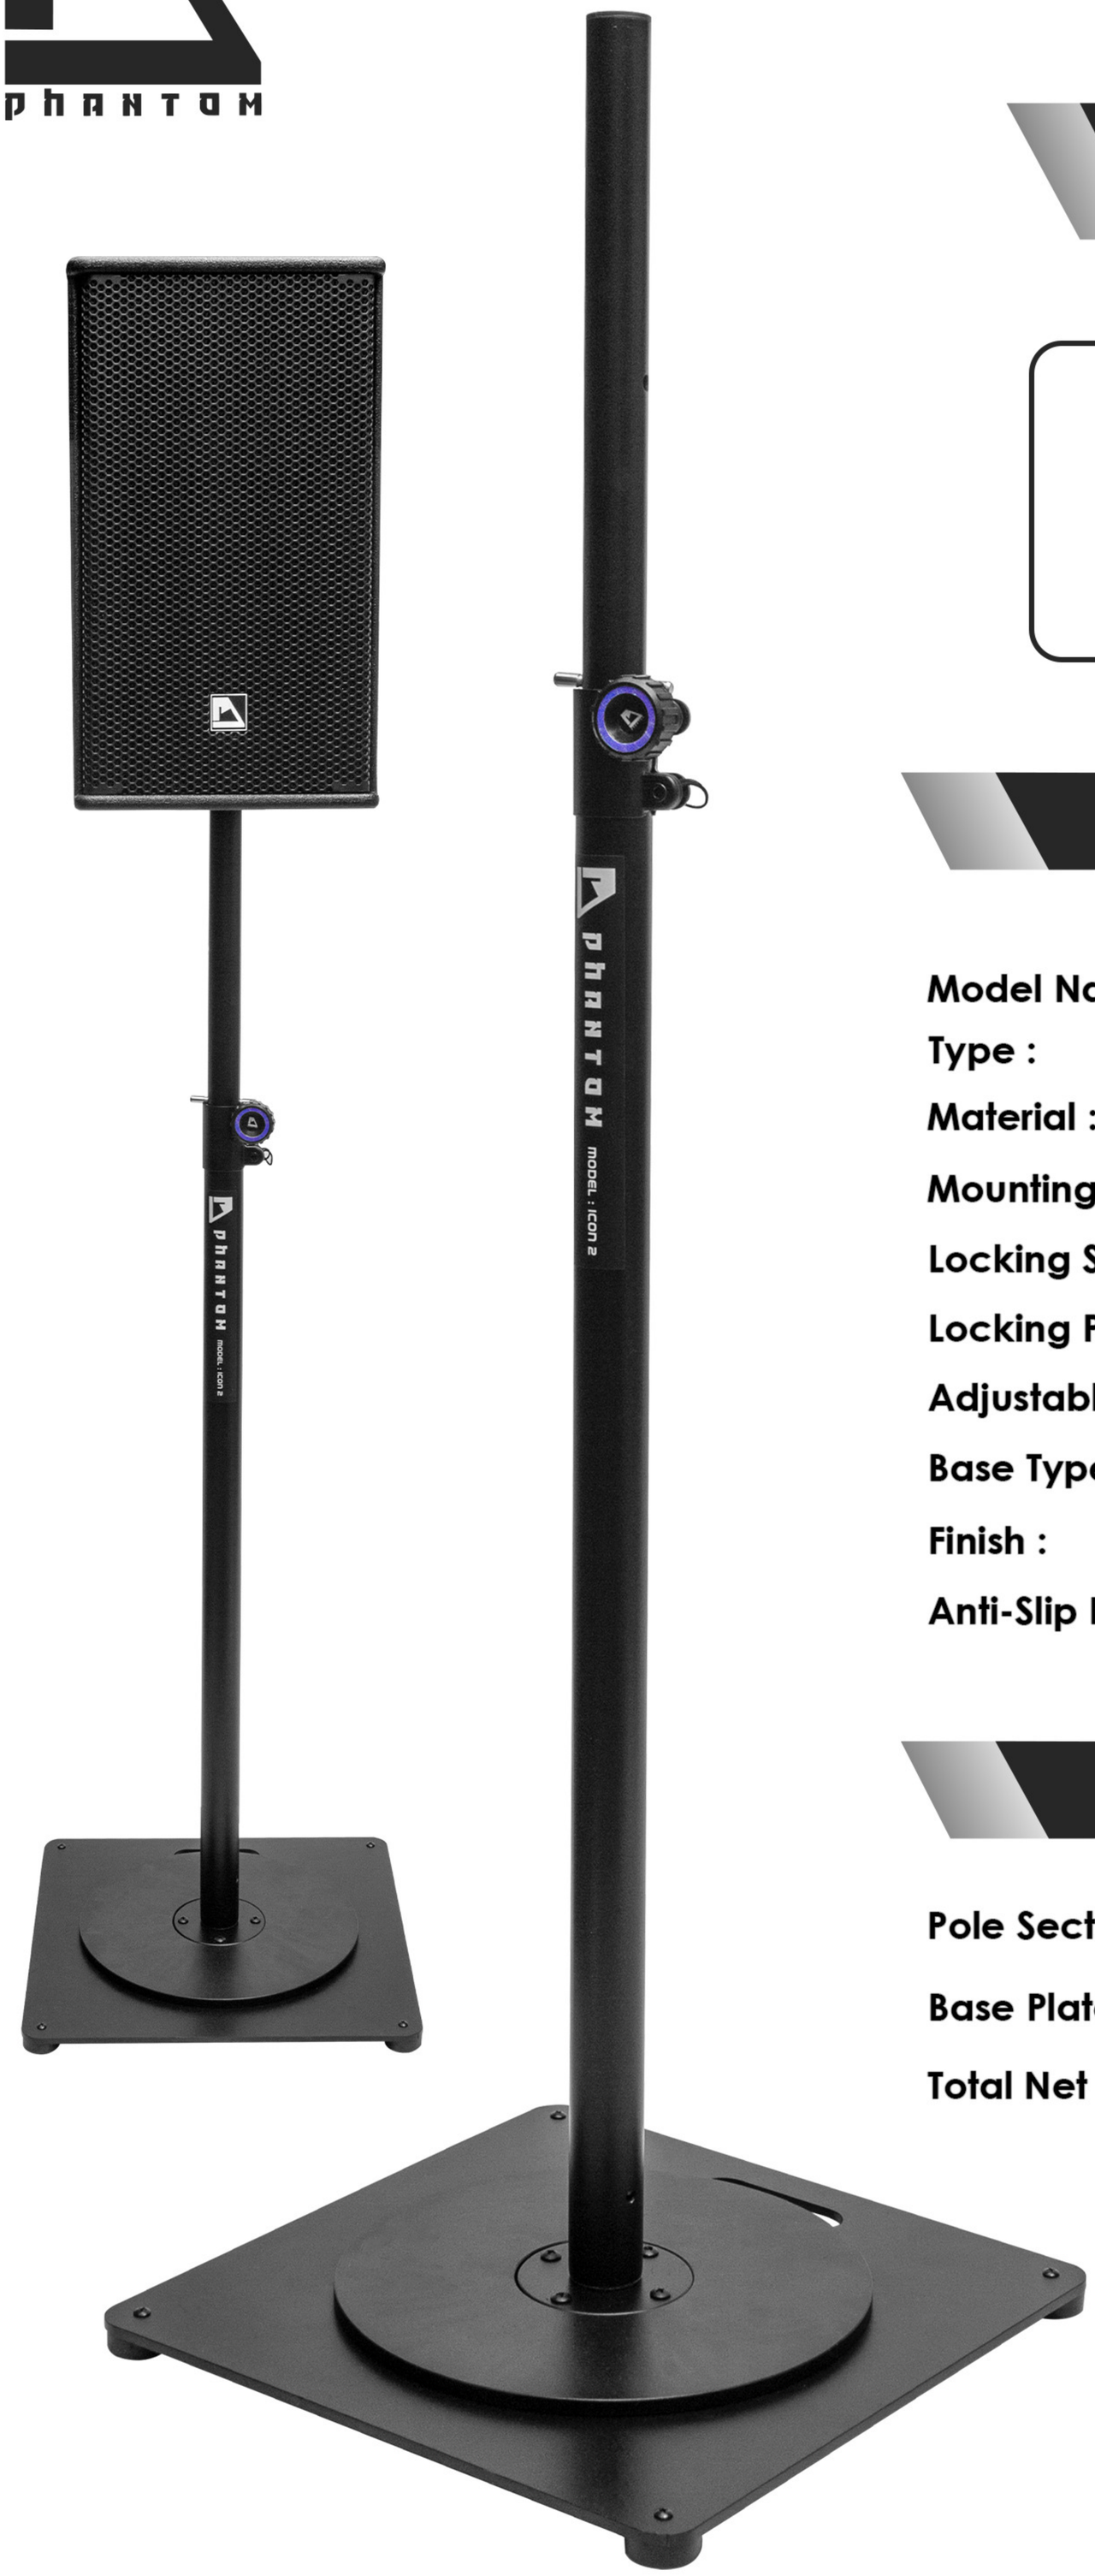

SPECIFICATION

Model Name :	Icon-2
Type :	Speaker Stand
Material :	Steel Construction
Mounting Socket Size :	Standard 35 mm
Locking System :	Height adjustment knob + Safety Pin
Locking Point :	5 Points
Adjustable Height :	100–172 cm
Base Type :	Heavy-duty Square Base
Finish :	Scratch-resistant powder coating
Anti-Slip Feet :	Anti-slip rubber feet

COMPONENT DETAILS & PACKAGE DIMENSIONS

Pole Section :	9 x 105 x 9 cm, Weight: 2.32 kg
Base Plate Section :	43 x 43 x 5 cm, Weight: 12.64 kg
Total Net Weight :	14.96 kg



SPEAKON
PH 4MPX

Speakon คุณภาพสูง จาก **Phantom Audio** ตัวถังผลิตจากวัสดุ **Nylon 66** หรือ **Polyamide (PA66)** แข็งแรง เหนียวทนทาน ต่อแรง กระแทกและแรงดึงทนต่อการขัดสีและการสึกหรอได้ดี ทนความร้อนสูงถึง **150°C** ส่วนสำคัญคือ แกนของ **Contact** ทำจาก **Beryllium Copper** แข็งแรงและทนทานกว่าทองแดงทั่วไป นำไฟฟ้าได้ดีเยี่ยม ความหนา **0.8mm.** ซึ่งหนากว่า **Speakon** มาตรฐานทั่วไปมาก และชุบด้วย **Silver Audio Grade** ความบริสุทธิ์ 6N ความหนา 6 ไมครอน ทำให้มีความทนทานต่อสภาพอากาศ และนำความถี่สูงได้ดีเยี่ยม

Technical Information

Properties :	PH 4MPX
Shell Material :	Nylon66 (Polyamide PA66)
Contact Material :	Beryllium Copper 0.8 mm.
Contact Plating :	6N Silver หนา 6 µm
Contact resistance :	≤ 0.01 Ohms
Dielectric strength :	3.5 kVac
Insulation resistance :	>0.1 GΩ (after dampheat)
Rated current per contact :	48 A rms continuous
Rated voltage :	400 V ac
Lifetime :	> 5000 mating cycles
Chassis shape :	D With M3 Brass Nut
Temperature range :	-30 °C to +150 °C



DIMENSIONS (mm)

