
LA30A v2

2-Way Professional Active Speaker



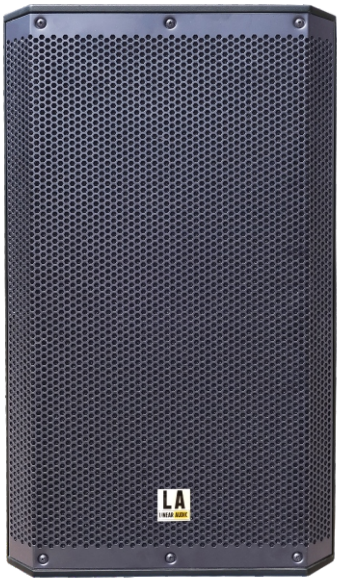

FEATURES

- 800W Class-D Bi-Amplification
- 12" Woofer / 1.35" Driver
- 45-20 kHz Linear frequency response
- 128 dB Maximum SPL@1M
- Coverage angle(HxV) 100°x60°
- For Public Address Applications / Outdoor sound system
- FIR Linear phase DSP processing
- Bluetooth Streaming

Bluetooth

FIR Linear phase

SPECIFICATIONS

Technical Data	Speaker Type	2-Way Professional Active Speaker
Acoustical data	Frequency Response [-10dB]	45 - 20000 Hz
	Max SPL	128 dB
	HF	Compression Driver, 1.35" V.C.
	LF	12 ", 2 " V.C.
	Crossover Frequency	Fir 1700 Hz
	Coverage angle(HxV)	100°x60°
Amplifier	Power Peak	800 W
Processor	DSP Controller	DSP 28/56 bit- 48 kHz
	Limiter	Peak, RMS, Thermal
Input	Main Connection	VDE
	Signal Input	Balanced 1xCombo IN (MIC/LINE)
	SIGNAL Out	(Balanced) 1xXLR OUT (LINK)
Mechanics	Housing	Polypropylene
	Grille	Full Metal Grille
Size	HeightxWidthxDepth:	642x370x363 mm
	Weight:	21 kg / 46.3 lbs
Shipping information	HeightxWidthxDepth:	675x445x417 mm
	Weight:	23 kg / 50.7 lbs