
LA45SUB

Active Subwoofer

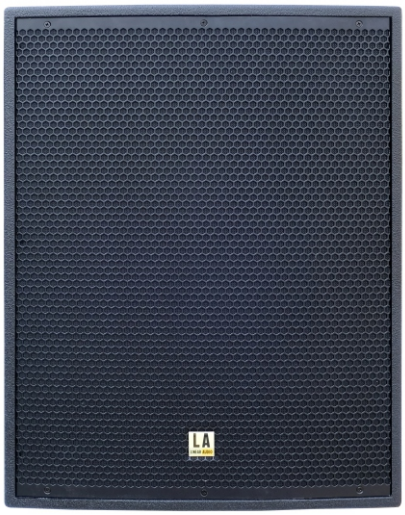


FEATURES

- 2000W Class-D Bi-Amplification
- 18" Woofer,Bass reflex
- 35-120Hz -10dB frequency response
- 135 dB Maximum SPL@1M
- Polyurea painted plywood
- For Touring / Outdoor/ Public Address Applications sound system

SPECIFICATIONS

Technical Data	Speaker Type	Active Subwoofer
Acoustical specifications	Frequency Response	35 - 120 Hz
	Max SPL @ 1m	135 dB
Transducers	Woofer	1 x 18", 3.0" voice coil
Input/Output section	Input signal	bal/unbal
	Input connectors	XLR
	Output connectors	XLR
	Input sensitivity	-2 dBu/+4 dBu
Processor section	Hi-Pass Frequencies	45 Hz
	Low-Pass Frequencies	100 Hz
	Protections	Thermal, RMS
	Limiter	Soft Limiter
	Controls	Volume 5-preset
Power section	Total Power	2000 W Peak, 1000 W RMS
	Cooling	Convection
	Connections	VDE
Physical specifications	Cabinet/Case Material	Polyurea painted plywood
	Handles	2 on the side panel
	Pole mount	34mm thread
	Grille	Powder Painted Steel
	Color	Black
Size	HeightxWidthxDepth:	665x515x630 mm
	Weight:	38.4 kg / 84.7 lbs



FRONT



BACK



SIDE