

CATALOG

maier[®]

PROFESSIONAL AUDIO ACCESSORIES & STANDS



CONTENTS

STANDS

1 - 3

MICROPHONE STANDS

4 - 5

SPEAKER STANDS

6-7

- SPEAKER POLES
- MUSIC STAND
- TABLET HOLDER

CABLES

8 - 9

SPEAKER CABLES

10-11

MICROPHONE CABLES

11 ...

- AUDIO CABLES
- INSTRUMENT CABLES



MiST-350D DESKTOP MICROPHONE STAND

Product type: Desktop microphone stand with round base

Adjustable height of multi-bracket: **260-380mm**

Material: **Steel**

Diameter of main tube: **20mm**



MiST-1460 MICROPHONE STAND

Microphone stand with round base. The stand is adjustable with a two-section cantilever and can rotate 180° up and down.

Product type: Microphone stand with round base

Length adjustable: **780-1395mm**

Cantilever adjustable angle: **0-180°**

Chassis diameter: **250mm**



MiST-1620S MICROPHONE STAND ONE-HAND CLUTCH

Product type: Microphone stand with tripod base and one-hand clutch

Length adjustable: **1020-1620mm**

Material: **Steel**

Diameter of main tube: **25mm**





MiST-SB450 SHORT MICROPHONE STAND


Product type: Short microphone stand with tripod base and adjustment telescoping boom arm.

Height: **450mm**

Telescoping boom length adjustment: **480-880mm**

Material: **Steel**

Diameter of main tube: **20mm**

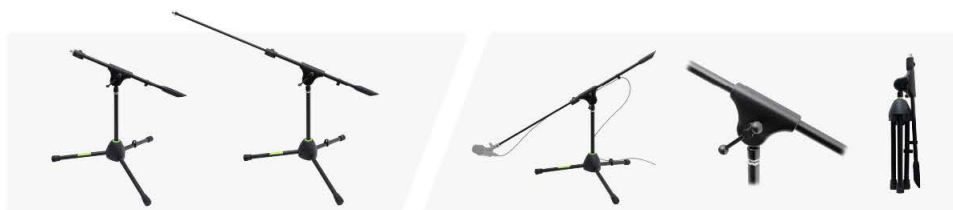

MiST-DB800 MICROPHONE STAND

Product type: Microphone stand with tripod base and adjustment telescoping boom arm.

Length adjustable: **550-800mm**

Telescoping boom length adjustment: **480-880mm**

Material: **Steel**

Diameter of main tube: **20mm**



MiST-DBI600C MICROPHONE STAND

Product type: Microphone stand with tripod base and one-hand clutch

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880mm**

Material: **Steel**

Diameter of main tube: **25mm**



MiST-DBI600F MICROPHONE STAND

Product type: Microphone stand with tripod base

One click lock to adjusts height

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880mm**

Material: **Steel**

Diameter of main tube: **25mm**



MiST-DBI600R MICROPHONE STAND

Product type: Microphone stand with tripod base

Clutch rotating to adjusts height

Length adjustable: **1000-1600mm**

Telescoping boom length adjustment: **480-880mm**

Material: **Steel**

Diameter of main tube: **20mm**





MSTS-TP1690 SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: Speaker stand

- The height-adjustable tripod speaker stands have a **locking clutch knob and safety pin.**
- **Upper pole mounting lock** ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1250-1830mm**

Material: **Steel** / Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **45kgs.**



MSTS-TP1700 SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: Speaker stand

- The height-adjustable tripod speaker stands have a **locking clutch knob and safety pin.**
- **Upper pole mounting lock** ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1220-1830mm**

Material: **Steel** / Main rod diameter: **41mm**

Tube end: **35mm** / Max. load: **50kgs.**



MSTS-TP1750A SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: Speaker stand.

The **die cast aluminium leg, Lightweight** construction.

- The height-adjustable tripod speaker stands have a **locking clutch knob and safety pin.**
- **Upper pole mounting lock** ensures the speaker fits.
- Tripod base folds down for ease of storage.

Length adjustable: **1250-1880mm**

Material: **Steel / Aluminium leg**

Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **45kgs.**

MSTS-TP1800R SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: Speaker stand.

- The height-adjustable tripod speaker stands have a **locking clutch knob and safety pin.**
- Tripod base folds down for ease of storage.

Length adjustable: **1020-1800mm**

Material: **Steel** / Main rod diameter: **38mm**

Tube end: **35mm** / Max. load: **100kgs.**



MSTS-TP1900R CRANK-UP SPEAKER STAND

Supports PA Loudspeaker, suit every usage professional quality standard-size pole with a diameter of 35 mm

Product type: **Crank-Up** speaker stand.

- Hand-crank speaker stand for height adjustments.
- Crank up speaker stand pole with metric graduation.
- The height-adjustable tripod speaker stands have a locking clutch knob.
- Tripod base folds down for ease of storage.
- Upper pole mounting point ensures the speaker fits.

Length adjustable: **1480-2420mm**

Material: **Steel** / Main rod diameter: **45mm**

Tube end: **35mm** / Max. load: **80kgs.**





MSTS-PM1 SUBWOOFER POLE WITH M20

Subwoofer Pole with **M20 thread Pole 35mm.** (standard speaker)
 Locking safety pin to ensure reliable speaker support
 M20-threaded connection to the subwoofer.

Product type: Subwoofer Pole with **M20**
Upper pole mounting lock ensures the speaker fits.
 (for satellite speakers.)

Length adjustable: **950-1300mm**

Material: **Steel**

Tube end: **35mm**

Max. load: **35kgs.**



MSTS-PMLi SUBWOOFER POLE WITH M20

Crank up subwoofer pole with M20 thread Pole 35mm. (standard speaker) Crank up subwoofer pole height adjustment. Support M20-threaded connection to the subwoofer.

Product type: **Crank up subwoofer pole with M20**

Length adjustable: **800-1100mm**

Material: **Steel**

Tube end: **35mm**

Max. load: **60kgs.**





STK-120S KARAOKE SPEAKER STAND

Stand for the speaker. Integrated cable management makes it simple to hide cables and keep your decor looking clean and elegant.

Product type: Speaker stand

Length adjustable: **650-1200mm**

The **upper plate** is width : 22.8cm / depth : 17.7cm

The **lower plate** is width : 25.3cm / depth : 23.2cm



MSN-DFI52 MUSIC STANDS

Music stand with One-hand quick-release clutch

Product type: **Music stand with one-hand clutch** height adjustment

- Bookplate displays multiple sheets at once and supports the weight of music books.
- Bookplate angle adjusts for clear, easy viewing.
- Height adjusts to a comfortable level for use standing.

Length adjustable: **880-1250mm** / Plate size: 345x475mm




PTH-101 TABLET HOLDER

The clamp-on tablet holder mounts to a microphone stand. A wide tilt and rotation range are easy to position for comfortable viewing and use.

Product type: Clamp-on tablet holder mounts to a microphone stand. **Used to fix iPads and other tablets** with screens that are **7-17 or 7-14 inches**. Multi-angle adjustment **360°/180°**

MSC SERIES HIGH QUALITY PROFESSIONAL SPEAKER CABLE

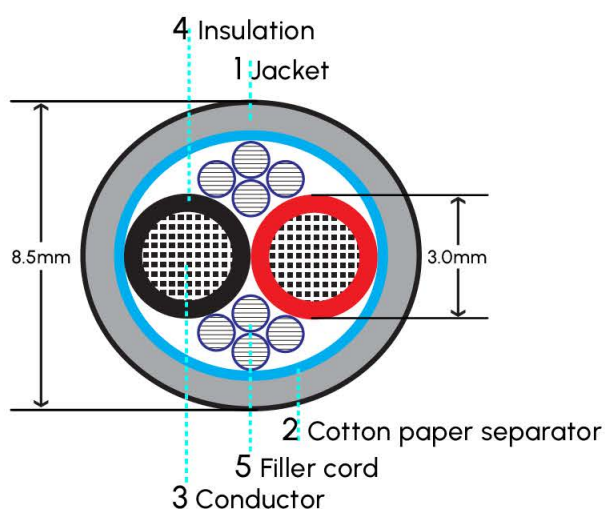

Maier speaker cable speakon
MSC Series range of loudspeaker connectors.

SPECIFICATION

Conductor	Size	1.5 mm ² / 16 AWG
	Composition	2 x (189 x 0.09 mm)
Insulation	Material	PVC
	Diameter	Ø3.0 mm ±0.1 mm
	Color	Red and Black
Filler	Material	Cotton Cords.
Jacket	Material	PVC
	Color	Blue
	Diameter	Ø8.5 mm, tolerance: ±0, 2mm
Number of positions (w/o PE)		4
Gender		female
Rated current		20A RMS
Rated voltage		AC 250V
Part category		female cable connector
Temperature range		-30°C to +80°C


MSC-SP02M	2 meters
MSC-SP03M	3 meters
MSC-SP05M	5 meters
MSC-SP10M	10 meters

Maier High Quality
Professional Speaker
Cable 2*1.5mm²



MSC SERIES SPEAKER CABLES

MSC-101	2x2.5MM ²	O.D.: 8.0MM
MSC-102	2x4.0MM ²	O.D.: 9.0MM



CROSS-SECTION

- Speaker cable includes 2 cores
- Conductor made of 99.99% OFC.
- Insulation made of highly flexible PVC.
- Jacket made of highly elastic PVC.

SPECIFICATION


CABLE MODEL	MSC-101	MSC-102
Inner conductor	Φ0.20BC*80	Φ0.12BC*350
Inner conductor section	2.5 mm ²	4.0 mm ²
conductor Isolation	PVC Φ3.2	PVC Φ4.0
Isolation colour	Blue/yellow	Blue/yellow
Number of conductors	2	2
Outer jacket	Flexible PVC	Flexible PVC
Outer jacket colour	Black & Dark Blue	Black & Dark Blue
Outer dimensions	Φ8.0 mm	Φ9.0 mm
Temperature range	min. -20°C	min. -20°C
	max. 70°C	max. 70°C
Packaging	100 m roll	100 m roll
Lead resistance - 1k meter	≤8 Ω	≤5 Ω

MMC SERIES

MICROPHONE CABLES

MMC-101
MICROPHONE CABLES

CROSS-SECTION



- Fine stranded wire for high-quality signal transmission.
- Very robust, with thick soft PVC jacket.
- Wonderful shielding **90%** provided by dense copper spiral shielding and semiconductor shielding.
- High flexible, well-suited for use with cable drums

SPECIFICATION

Inner conductor	Φ0.12 BC*20
Inner conductor section	0.23 mm ²
conductor Isolation	HDPE Φ1.4
Isolation colour	Red/White
conductor twisting	Yes
Shielding	Φ0.12Cu*64 spiral
Outer jacket	Flexible PVC
Outer dimensions	Φ6.0 mm
Temperature range	min. -20°C max. 70°C
Packaging	100m roll
Lead resistance - 100m	≤9.1 Ω
Cable crosstalk - 100m	Min 73.3dB

MMC-102
MICROPHONE CABLES

CROSS-SECTION



- Fine stranded wire for high-quality signal transmission.
- Very robust, with thick soft PVC jacket.
- Wonderful shielding **85%** provided by dense copper braided shielding and semiconductor shielding.
- High flexible, well-suited for use with cable drums

SPECIFICATION

Inner conductor	Φ0.12 BC*20
Inner conductor section	0.23 mm ²
conductor Isolation	LDPE Φ1.3
Isolation colour	Red/White
conductor twisting	Yes
Shielding 1	Conductive PVC
Shielding 2	Φ0.12Cu*64 spiral
Outer jacket	Flexible PVC
Outer dimensions	Φ6.0 mm
Temperature range	min. -20°C max. 70°C
Packaging	100 m roll
Lead resistance - 100m	≤9.1 Ω
Cable crosstalk - 100m	Min 73.3dB

MICROPHONE CABLES

MICROPHONE CABLES

PMXF-05MB	5 meters
PMXF-10MB	10 meters
PMXF-15MB	15 meters
PMXF-20MB	20 meters



- XLR female to 6.35mm Jack male mono
- Cable MMC-102 OFC conductor $\Phi 6\text{mm}$
- Shell plating Black plated
- 4 lengths(meter): 5m, 10m, 15m, 20m

MICROPHONE CABLES

XMFM-05M	5 meters
XMFM-10M	10 meters
XMFM-15M	15 meters
XMFM-20M	20 meters



- XLR male to XLR female
- Cable MMC-102 OFC conductor $\Phi 6\text{mm}$
- Shell plating Black plated
- 4 lengths(meter): 5m, 10m, 15m, 20m

AUDIO CABLES

AUDIO CABLES

MPSR2-A01M	1 meter
MPSR2-A02M	2 meters



- 3.5mm Jack male stereo to 2 x 6.35mm Jack male mono
- Cable conductor $\Phi 4*8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

MPSPM2- A01M	1 meter
MPSPM2- A02M	2 meters



- 3.5mm Jack male stereo to 2 x 6.35mm Angled Jack male mono
- Cable conductor $\Phi 4*8\text{mm}$ black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

AUDIO CABLES

RCLR2-A01M 1 meter
RCLR2-A02M 2 meters



- 2 x RCA male to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

RCMPS-A01M 1 meter
RCMPS-A02M 2 meters



- 3.5mm Jack male stereo to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

INSTRUMENT CABLES

INSTRUMENT CABLES

PMPM-A03M 3 meters
PMPM-A05M 5 meters
PMPM-A10M 10 meters



- 6.35mm Jack male mono to 6.35mm Jack male mono
- Cable conductor $\Phi 6.0$ mm black
- Shell plating Black plated
- 3 lengths(meter): 3m, 5m, 10m

INSTRUMENT CABLES

PMPML-A03M 3 meters
PMPML-A05M 5 meters
PMPML-A10M 10 meters



- 6.35mm Jack male mono to 6.35mm Angled Jack male mono
- Cable conductor $\Phi 6.0$ mm black
- Shell plating Black plated
- 3 lengths(meter): 3m, 5m, 10m

AUDIO CABLES

AUDIO CABLES

PMRC2-A01M
PMRC2-A02M

1 meter
2 meters



- 2 x 6.35mm Jack male mono to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

PSPM2-A01M
PSPM2-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 2 x 6.35mm Jack male mono
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

AUDIO CABLES

PSPS-A01M
PSPS-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 6.35mm Jack male stereo
- Cable conductor $\Phi 6$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

AUDIO CABLES

PSRC2-A01M
PSRC2-A02M

1 meter
2 meters



- 6.35mm Jack male stereo to 2 x RCA male
- Cable conductor $\Phi 4 \times 8$ mm black
- Shell plating Black plated
- 2 lengths(meter): 1m, 2m

FLAT AUDIO CABLE OXYGEN-FREE COPPER CONDUCTOR

Professional flat audio cable oxygen-free copper conductor perfectly designed gives this cable maximum flexibility to ensure maximum signal transfer from your source device to your audio equipment.

FEATURES :

- High standard 20AWG Oxygen free copper conductor features high conductance and low attenuation.
- The flat architecture of cable prevents the signal distortion by the interference of conductor spacing.
- The soft PVC outer jacket has a high degree of usability for cable connection.
- 2 lengths(meter): 1m, 2m

Structure _____	Flat cable
Conductor _____	20AWG Oxygen-free copper
Insulator _____	HDPE
Outer jacket _____	Flex Pvc
Housing _____	PVC

**MPSPS GF 3.5mm male
to 1/4 TRS plug male**



MPSPS-GF01M 1 meter
MPSPS-GF02M 2 meters

**MPSPS GF2 3.5mm male
to 3.5mm male**



MPSPS-GF201M 1 meter
MPSPS-GF202M 2 meters

**MPSPS GF3 3.5mm male
to 3.5mm RA male**



MPSPS-GF301M 1 meter
MPSPS-GF302M 2 meters

PMPM GF 1/4 TS plug male to 1/4 TS plug male

PMPM-GF01M 1 meter
PMPM-GF02M 2 meters

PMRM GF 1/4 TS plug male to RCA male

PMRM-GF01M 1 meter
PMRM-GF02M 2 meters

PSPS GF 1/4 TRS plug male to 1/4 TRS plug male

PSPS-GF01M 1 meter
PSPS-GF02M 2 meters

RMRM GF RCA male to RCA male

RMRM-GF01M 1 meter
RMRM-GF02M 2 meters

XFPM GF XLR 3P.female to 1/4 TS plug male

XFPM-GF01M 1 meter
XFPM-GF02M 2 meters

XFPS GF XLR 3P.female to 1/4 TRS plug male

XFPS-6301G 1 meter
XFPS-6302G 2 meters

XFXM GF XLR 3P.female to XLR 3P.male

XFXM-GF01M 1 meter
XFXM-GF02M 2 meters

XMPM GF XLR 3P.male to 1/4 TS plug male

XMPM-GF01M 1 meter
XMPM-GF02M 2 meters

XMPS GF XLR 3P.male to 1/4 TRS plug male

XMPS-GF01M 1 meter
XMPS-GF02M 2 meters

maier®

PROFESSIONAL AUDIO
ACCESSORIES STANDS

CATALOG

Imported and distributed by

SOUND VISION CO., LTD.

99/189 MOO.4, SALA KLANG, BANG KRUAI,
NONTABURI 11130 THAILAND

SUPPORT : 02-433-9988 LINE OFFICIAL : @SOUNDVISION
EMAIL : INFO@SOUNDVISION.CO.TH WWW.SOUNDVISIONPRO.COM

